

Key Features

All Teflon® wetted parts model available. No seals. Undamaged by over ranging.

Features

- No Bearings
- Single Moving Part
- In Line Metering
- No Rotating Internals
- Materials: 316SS, Brass or Teflon®
- Output: Analog, Digital and Current loop
- Measures Low Flows

Applications

- Wet Benches
 - Cooling Systems
 - Corrosive Chemical Dispensing
 - Materials Consumption Measurement
 - Process Controls
- Patent No's
4,858,647
4,905,844
5,033,311
Others may apply.

Operation

When fluid flows through the unit it displaces the Teflon encapsulated magnetic piston. This displacement is proportional to the volumetric flow through the unit. A transducer, encapsulated in the body outside the fluid path, senses the displacement of the piston. The transducer's signal is converted by a microprocessor-based conditioning circuit then sends the signal to three types of outputs: voltage, pulse and current loop.

- Total Accuracy: ±5%
- Repeatability: ±2% Full Scale
- Linearity: ±2% Full Scale

Temperature Operating Range

- AMBIENT: 0° to 125°F (-18° to 52°C)
- MEDIA: 0° to 180° F (-18° to 82°C)

| Specifications | | | |
|----------------|-------------------|----------------------------------|----------------|
| Model | Weight Lbs. (Kg.) | Max Working Pressure PSIG (barg) | Wetted Parts |
| MAO-500-T | 1.3 (0.6) | 80 (5.51) | Teflon® |
| MAO-500-B | 3.4 (1.54) | 1500 (103.42) | Brass, Teflon® |
| MAO-500-S | 3.4 (1.54) | 3000 (206.84) | 316SS, Teflon® |

| Pressure Loss | | |
|---------------|------------------------|-----------------|
| Model | Linear Range LPM (GPM) | ΔP MBARS (PSID) |
| MAO-500-AA | 1.89 (0.5) | 247.58 (0.4) |
| | 7.57 (2.0) | 31.03 (0.45) |
| MAO-500-BB | 3.79 (1.0) | 27.58 (0.40) |
| | 13.25 (3.5) | 68.95 (1.0) |



Calibration in Water

| Model | GPM (LPM) | VDC | Hz | mA | Ports FNPT |
|------------|-------------|-----|-----|----|------------|
| MAO-500XAA | 0 | 0 | 0 | 0 | 1/2" |
| | 0.5 (1.89) | 1 | 40 | 4 | |
| | 0.75 (2.84) | 2 | 80 | 8 | |
| | 1.25 (4.73) | 3 | 120 | 12 | |
| | 1.75 (6.62) | 4 | 160 | 16 | |
| | 2 (7.57) | 5 | 200 | 20 | |
| MAO-500XBB | 0 | 0 | 0 | 0 | 1/2" |
| | 1 (3.79) | 1 | 40 | 4 | |
| | 1.6 (6.06) | 2 | 80 | 8 | |
| | 2.2 (8.33) | 3 | 120 | 12 | |
| | 2.8 (10.6) | 4 | 160 | 16 | |
| | 3.5 (13.25) | 5 | 200 | 20 | |

Electrical Specifications


POWER REQUIREMENTS:
Voltage: Regulated 15 – 30 VDC
Current: 250 mA

OUTPUTS:
ANALOG: 0 – 5 VDC
Minimum Load Impedance: 5k ohm in parallel with 250pf

DIGITAL:
200 Hz, Square wave 50% duty cycle TTL compatible output

CURRENT LOOP:
Current Loop: 4 - 20 mA
Loop Load : 100Ω ±1% 1/4 watt

WIRE CONNECTION:
Red – (+)
Black – (Common)
White – (Frequency)
Green – (Voltage)
Brown – (Current)

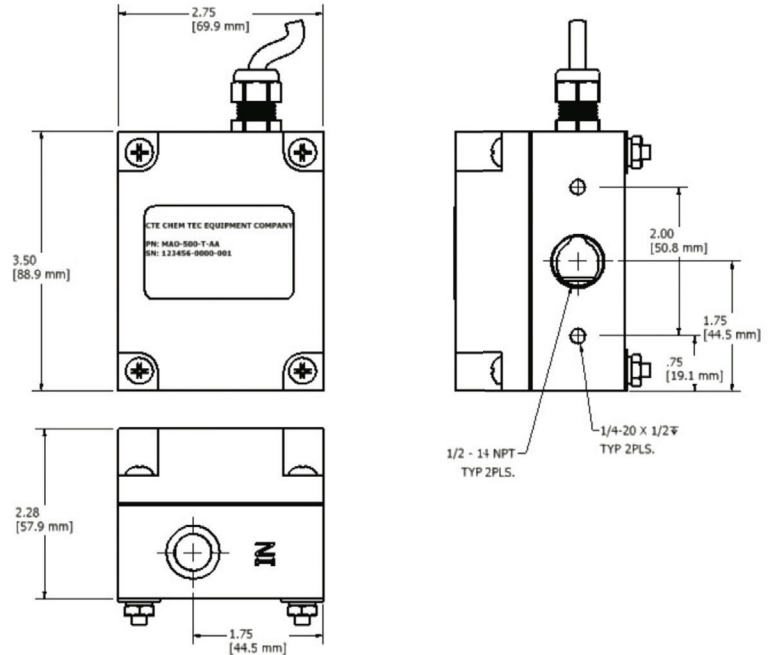

How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size | Switch | Options |
|-------|------|---|-------------------------|
| MAO | 500 | T Teflon® B Brass S Stainless Steel | (See Chart) AA BB |

*Consult Factory **Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

Installation

Control valves should be placed downstream of the MAO flow meter. The flow meter should never be installed so that it drains completely when flow ceases.

When particles may be present in the media, a filter should be installed ahead of the flow meter. It is advisable to filter to 10 microns. The MAO flow meter should not be located near ferrous material or near strong electro-magnetic fields.

The MAO flow meter is sensitive to velocity profile disturbances in the flow stream. It is advisable that straight lengths of 10 inside diameters upstream and 5 inside diameters downstream be used.

All lines should be completely purged of air before use.

The use of pipe paste is not recommended. Use care when using Teflon tape to avoid shreds from entering the MAO flow meter.

Mounting

Mount with INLET vertical, INLET port down, OUTLET port horizontal.