



# ChemTec

**Flow Monitors**

**Excess Flow Valves**

**Flow Meters**



# Table of Contents

|                         |    |
|-------------------------|----|
| LPH Series.....         | 01 |
| FS Series.....          | 03 |
| LFS Series.....         | 05 |
| 125 Series.....         | 07 |
| 125 BP Series.....      | 09 |
| 500 BP Series.....      | 11 |
| LCA Series.....         | 13 |
| FAV Series.....         | 15 |
| CCM Series.....         | 17 |
| MAO 125/250 Series..... | 19 |
| MAO 500 Series.....     | 21 |
| EFV Series.....         | 23 |
| EFV MRS Series.....     | 25 |
| HPEFV Series.....       | 27 |
| TEFLON® Products.....   | 29 |
| LPH UHP Series.....     | 30 |
| XE-1201.....            | 35 |

# LPH Series

Non-Adjustable Flow Monitor

## Key Features

Compact, Dependable, Economical

## Features

- Close On-Off Differential
- Visual Indication of Flow with Acrylic Model
- No Seals
- In Line Vertical Plumbing
- Materials: Acrylic, Brass, 316SS or Teflon®
- Confirms: Normal Flow Conditions
- Senses: High Flow and Low Flow Conditions
- Output: Switch Contact

## Applications

- Analyzers
- Kidney Dialysis Machines
- Micro Biomedical Machines
- Laser Cooling Systems
- Bubbler Systems
- Pollution Sampling Equipment

## FNPT Port Sizes

- LPH 125 - 1/8"
- LPH 250 - 1/8"
- LPH 375 - 1/4"



## Operation

When air/water flows through the unit it causes the magnetic piston to move up at the calibration point. This displacement is caused by the pressure differential from the air/water flowing through the unit. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path. Decreasing the flow below the calibration point causes the reed switch to de-actuate.

- Actuation points for air at 68°F and 14.7 PSIA with increasing flow.
- Deactuation (decreasing flow) averages 10% less than actuation (increasing flow).
- Calibration accuracy  $\pm 10\%$  of calibration points shown.
- Repeatability  $\pm 1\%$ .
- Unit will pass greater flows.

## Pressure Loss

$\Delta P$  AT SET POINT  
MBARS (INCHES OF WATER)  
ALL UNITS 11.2 (4.5)

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Specifications

| Body Material | Weight OZ (gm) | Max Working Pressure PSIG (barg) | Wetted Parts          |
|---------------|----------------|----------------------------------|-----------------------|
| Acrylic       | 4 (113.4)      | 100 (6.89)                       | Acrylic, 316SS, Epoxy |
| Brass         | 8 (226.8)      | 1500 (103.42)                    | Brass, 316SS, Epoxy   |
| 316SS         | 8 (226.8)      | 3000 (206.84)                    | 316SS, Epoxy          |
| Teflon        | 4 (113.4)      | 80 (5.52)                        | Teflon®               |

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C) for 316SS, Brass and Teflon®
  - 32° to 160°F (0° to 71°C) for Acrylic
- For other temperature ranges consult factory.

## Calibration Table

| Model   | Air SCC/M (SCFH) | Water ML/M (GPH) |
|---------|------------------|------------------|
| LPH-125 |                  |                  |
| 0       | 50 (0.105)       | 1 (0.016)        |
| -1      | 120 (0.254)      | 2 (0.03171)      |
| -2      | 560 (1.187)      | 16 (0.25369)     |
| -3      | 750 (1.589)      | 30 (0.47567)     |
| -4      | 1300 (2.755)     | 45 (0.71350)     |
| -5      | 1400 (2.966)     | 50 (0.79278)     |
| -6      | 1900 (4.026)     | 65 (1.0306)      |
| -7      | 2500 (5.297)     | 85 (1.3477)      |
| -8      | 2700 (5.721)     | 90 (1.4270)      |
| -9      | 3300 (6.992)     | 105 (1.6648)     |
| -10     | 3600 (7.628)     | 120 (1.9027)     |
| -11     | 5200 (11.02)     | 170 (2.6955)     |
| -12     | 6000 (12.71)     | 200 (3.1711)     |
| LPH-250 |                  |                  |
| -1      | 350 (0.742)      | 7 (0.111)        |
| -2      | 6000 (12.71)     | 200 (3.171)      |
| -3      | 7500 (15.89)     | 250 (3.964)      |
| -4      | 9500 (20.12)     | 315 (4.994)      |
| -5      | 10500 (22.25)    | 346 (5.486)      |
| -6      | 12500 (26.49)    | 400 (6.342)      |
| -7      | 15200 (32.21)    | 500 (7.928)      |
| -8      | 24000 (50.85)    | 760 (12.05)      |
| LPH-375 |                  |                  |
| -1      | 3000 (6.36)      | 70 (1.110)       |
| -2      | 15200 (32.21)    | 475 (7.531)      |
| -3      | 30300 (64.20)    | 950 (15.06)      |
| -4      | 37000 (78.40)    | 1425 (22.59)**   |
| -5      | 45300 (95.99)    | 2200 (34.88)**   |

\*\*Teflon® encapsulated piston not available






\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# LPH Series

Non-Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070  |
|---|---|---|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |

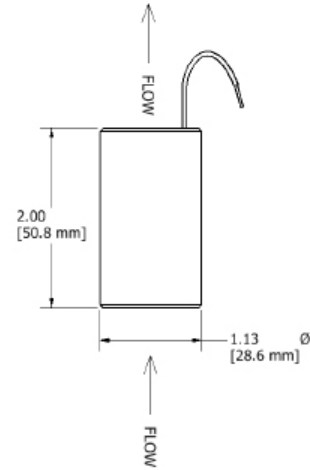

## Installation

Mount with the inlet port down vertically. A 10 micron filter is recommended.

- |             |                          |
|-------------|--------------------------|
| Leads Up;   | Normally Open            |
| Leads Down; | Normally Closed          |
| Conduit;    | N.O. Conduit Offset Down |
|             | N.C. Conduit Offset Up   |

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size              | Calibration    | Materials   | Electrical Conduit                   | Media            | Switch  | Options  |
|-------|-------------------|----------------|---|--------------------------------------|------------------|---|--|
| LPH   | 125<br>250<br>375 | See Cal. Table | A Acrylic<br>B Brass<br>S 316SS<br>T Teflon®<br><br>(TFE piston standard in Teflon units) | C (Metallic Bodies Only) (1/2" FNPT) | W Water<br>A Air | N.O. Single Pole Single Throw Normally Open   | TFE Teflon® Encapsulated Piston (Standard in Teflon Units)   |
|       |                   |                |   |                                      |                  | N.C. Single Pole Single Throw Normally Closed | 02 Oxygen Cleaned  |
|       |                   |                |   |                                      |                  | SPDT Single Pole Double Throw                 | HT High Temperature Options 340°F (171°C) metallic body only |
|       |                   |                |   |                                      |                  | DSNONO Double Switch N.O./N.O.                | HV High Voltage Switch (220 VAC)                             |
|       |                   |                |   |                                      |                  | DSNONC Double Switch N.O./N.C.                |  |
|       |                   |                |   |                                      |                  | DSNCNC Double Switch N.C./N.C.                |  |
|       |                   |                |   |                                      |                  | DCNONO Double Conduit N.O./N.O.               |  |
|       |                   |                |   |                                      |                  | DCNONC Double Conduit N.O./N.C.               |  |
|       |                   |                |   |                                      |                  | DCNCNC Double Conduit N.C./N.C.               |  |

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

### Key Features

Economical Liquid Flow Sensor

### Features

- Non-Adjustable Flow Monitor
- Low Maintenance
- Close On-Off Differential
- No Seals
- Single Moving Part
- In Line Vertical Plumbing
- Materials: 316 SS, Brass or PVC
- Confirms: Normal Flow Condition
- Senses: High Flow or Low Flow Conditions
- Output: Switch Contact

### Applications

- Laser Cooling Systems
- Heat Pumps
- Cooling Systems



### Operation

As flow is established upward through the unit and continues to increase, the pressure differential across the magnetic piston increases until it overcomes the magnetic piston's resistance (mass). The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path. This is a snap action and occurs in the decreasing mode as well.

- Actuation Points for increasing flow
- Calibration Accuracy  $\pm 10\%$  of actuation point
- Deactuation (decreasing flow) averages 10% less than actuation (increasing flow)
- Repeatability  $\pm 2\%$
- Unit will pass greater flows

### Temperature Operating Range

- 0° to 228°F (-17° to 104°C) for Brass and Stainless Steel
- 32° to 120° F (0° to 49°C) for PVC

For other temperature ranges consult factory.

### Specifications

| Body Material | Weight     | Max Working Pressure PSIG (barg) | Wetted Parts |
|---------------|------------|----------------------------------|--------------|
| PVC           | 1/2" 0.2lb | 100 (6.89)                       | PVC, Epoxy   |
| Brass         | 1/2" 0.7lb | 250 (17.22)                      | Brass, Epoxy |
| 316SS         | 1/2" 0.7lb | 500 (34.45)                      | 316SS, Epoxy |
| PVC           | 3/4" 0.3lb | 100 (6.89)                       | PVC, Epoxy   |
| Brass         | 3/4" 1.0lb | 250 (17.22)                      | Brass, Epoxy |
| 316SS         | 3/4" 0.1lb | 500 (34.45)                      | 316SS, Epoxy |
| PVC           | 1" 0.4lb   | 100 (6.89)                       | PVC, Epoxy   |
| Brass         | 1" 1.2lb   | 250 (17.22)                      | Brass, Epoxy |
| 316SS         | 1" 1.2lb   | 500 (34.45)                      | 316SS, Epoxy |

### Calibration Table

| Model | PVC LPM (GPM) | Brass or 316SS LPM (GPM) |
|-------|---------------|--------------------------|
| FS-50 |               |                          |
| -A    | 0.57 (0.15)   | 0.95 (0.25)              |
| -B    | 0.95 (0.25)   | 1.89 (0.50)              |
| -C    | 1.89 (0.50)   | 3.79 (1.00)              |
| -D    | 2.84 (0.75)   | 5.68 (1.50)              |
| -E    | 3.79 (1.00)   | 7.57 (2.00)              |
| -F    | 4.73 (1.25)   | 9.46 (2.50)              |
| FS-75 |               |                          |
| -A    | 0.76 (0.20)   | 1.89 (0.50)              |
| -B    | 1.89 (0.50)   | 3.79 (1.00)              |
| -C    | 2.84 (0.75)   | 7.57 (2.00)              |
| -D    | 3.79 (1.00)   | 11.4 (3.00)              |
| -E    | 3.68 (1.50)   | 15.1 (4.00)              |
| -F    | 7.57 (2.00)   | 21.8 (5.75)              |
| FS-1  |               |                          |
| -A    | 0.95 (0.25)   | 7.57 (2.00)              |
| -B    | 2.84 (0.75)   | 9.46 (2.50)              |
| -C    | 3.79 (1.00)   | 11.4 (3.00)              |
| -D    | 7.57 (2.00)   | 15.1 (4.00)              |
| -E    | 11.4 (3.00)   | 22.7 (6.00)              |
| -F    | 15.1 (4.00)   | 32.2 (8.50)              |

### Pressure Loss

$\Delta P$  to atmosphere at set point PSID (BARD)

Water PVC Units  
All set points - 0.50 (0.034)

Metal Units  
All set points - 1.00 (0.069)





\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# FS Series

Non-Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070  |
|---|---|---|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |


| Fluid | Ports: Inlet/Outlet | Ports Inches          |
|-------|---------------------|-----------------------|
| Model | FNPT (PVC)          | MNPT (Brass or 316SS) |
| FS-50 | 1/2"                | 1/2"                  |
| FS-75 | 3/4"                | 3/4"                  |
| FS-1  | 1"                  | 1"                    |

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size             | Calibration           | Materials                   | Switch   | Options   |
|-------|------------------|-----------------------|-----------------------------|--|---|
| FS    | -50<br>-75<br>-1 | A                     | P PVC<br>B Brass<br>S 316SS | N.O. Single Pole Single Throw<br>Normally Open | HT High Temperature<br>Option 340°F (171°C)<br>(metallic body only) |
|       |                  | B<br>C<br>D<br>E<br>F |                             | SPDT Single Pole<br>Double Throw               |   |

Note: All dimensions are subject to change for quality improvement. Not responsible for printing errors.

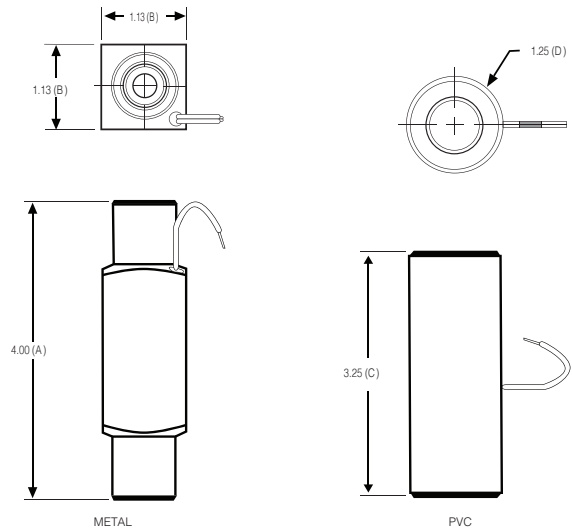

### Installation

Mount vertically, inlet down.  
Filtration - 100 Micron Filter Recommended.

| Dimensions Inches (mm) |   |               |              |              |
|------------------------|---|---------------|--------------|--------------|
|                        |   | FS-50         | FS-75        | FS-1         |
| METAL                  | A | 4.00 (101.6)  | 4.50 (114.3) | 4.50 (114.3) |
| METAL                  | B | 1.125 (28.70) | 1.25 (31.75) | 1.50 (38.10) |
| PVC                    | C | 3.25 (88.52)  | 3.75 (95.25) | 4.50 (114.3) |
| PVC                    | D | 1.25 (31.75)  | 1.50 (38.10) | 1.75 (44.45) |

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# LFS Series

Non-Adjustable Flow Monitor

## Key Features

Chemically inert, Non-restrictive at higher flows.

## Features

- Close On-Off Differential
- In Line Vertical Plumbing
- Confirms: Normal Flow Conditions
- Senses: High Flow or Low Flow Conditions
- Material: Polypropylene
- Output: Switch Contact

## Applications

- Deionized Water
- Chemical Process Systems
- Cooling Systems
- Heat Pump Systems
- Laser Cooling Systems

## Operation

As flow is established upward through the unit and continues to increase, the pressure differential across the magnetic piston increases until it overcomes the magnetic piston's resistance (mass). The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path. This is a snap action and occurs in the decreasing mode as well.

- Actuation Points for increasing flow
- Calibration Accuracy  $\pm 10\%$  of actuation point
- Deactuation (decreasing flow) averages 10% less than actuation (increasing flow)
- Repeatability  $\pm 2\%$
- Unit will pass greater flows

## Temperature Operating Range


- 0° to 228°F (-17° to 104°C) for Brass and Stainless Steel
  - 32° to 120°F (0° to 49°C) for Polypropylene
- For other temperature ranges consult factory.

| Specifications |                |                                  |              |       |
|----------------|----------------|----------------------------------|--------------|-------|
| Unit           | Weight OZ (gm) | Max Working Pressure PSIG (barg) | Wetted Parts | Seals |
| Polypropylene  | 10.469 (0.213) | 100 (6.89)                       | PP, Epoxy    | Viton |

## Pressure Loss

$\Delta P$  at 5 GPM (18.925) PSID (BARD)  
All set points - 1.00 (0.069)

CE

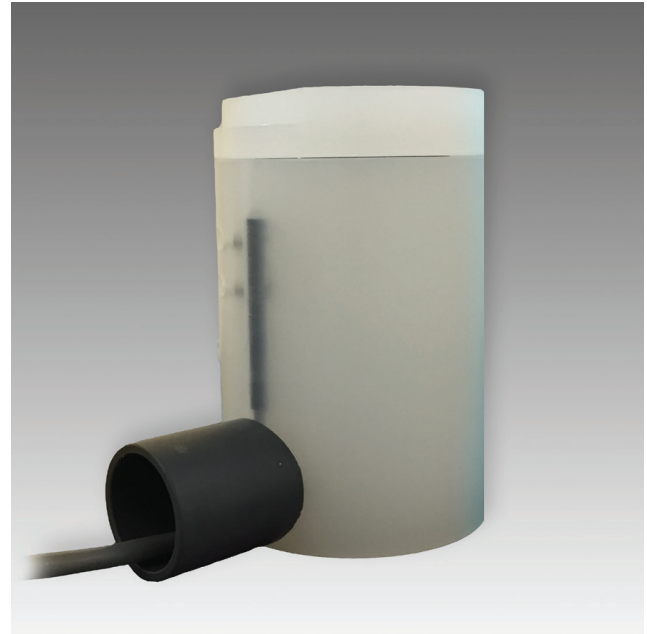

## Calibration Table

| Model        | Water LPM (GPM) |
|--------------|-----------------|
| LFS-500-PP-C |                 |
| -1           | 0.38 (0.10)     |
| -2           | 1.89 (0.50)     |
| -4           | 3.78 (1.00)     |
| -6           | 5.68 (1.50)     |
| -8           | 7.57 (2.00)     |



Corrections must be made for other liquids, line pressures and temperatures. Please consult your representative or the factory.

*\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.*


# LFS Series

Non-Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads  | SPST<br>UL File #E471070   | SPDT<br>UL File #E471070   |
|--|--|--|
|  <p>leads 39 in. min. from body 22 AWG, PVC jacketed wire, red, black</p> |  <p>leads 39 in. min. from body 22 AWG PVC jacketed wired,<br/> <ul style="list-style-type: none"> <li>• red - N.C.</li> <li>• black - N.O.</li> <li>• white - Common</li> </ul> </p> | <p>leads 39 in. min. from body 22 AWG PVC jacketed wired,<br/> <ul style="list-style-type: none"> <li>• red - N.C.</li> <li>• black - N.O.</li> <li>• white - Common</li> </ul> </p> |

| Fluid | Ports: Inlet/Outlet | Ports Inches             |
|-------|---------------------|--------------------------|
| Model | FNPT                | Electrical Conduit       |
| LFS   | 1/2"                | 1/2" Female Slip Fitting |

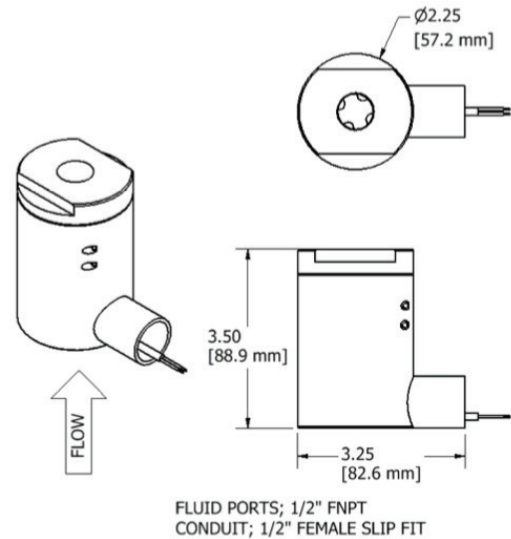

## Installation

Mount with inlet port down vertically. A 100 micron filter is recommended.

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model       | Calibration | Switch                                      |
|-------------|-------------|---|
| LFS 500 PPC | -1          | N.O. Single Pole Single Throw Normally Open |
|             | -2          |   |
|             | -4          | SPDT Single Pole Double Throw               |
|             | -6          |   |
|             | -8          |   |

Note: All dimensions are subject to change for quality improvement. Not responsible for printing errors.  
 Viton®

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.



# 125 Series

Standard Unobtrusive Adjustable Flow Monitor

## Key Features

Best for applications where the ratio (Normal Flow/Set Point) is 10:1 or greater, minimal pressure drop.

## Features

- Broad Range of Adjustability
- Compact Size
- High Resolution
- Materials: 316SS, Brass or Teflon®
- Confirms: Normal Flow Conditions
- Senses: High Flow and Low Flow Conditions
- Output: Switch Contact

## Applications

- Welding Systems
- Analyzers
- Vacuum Systems
- Cooling Systems
- Chillers
- Biochemical Instruments
- Process Flows

## Operation

A magnetic piston is suspended by the repulsion of a fixed magnet. When fluid flows through the unit it causes the magnetic piston to move against the repulsion of the fixed magnet. The magnet piston actuates an encapsulated hermetically-sealed reed switch out of the fluid path. Decreasing the flow below the calibration point causes the reed switch to de-actuate. Set point is adjustable.

- Actuation Points for air at 68°F and 14.7 PSIA with increasing flow
- Deactuation (decreasing flow) averages 30% less than actuation (increasing flow).
- Repeatability ±2%
- Unit will pass greater flows

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C)
- For other temperature ranges consult factory.

| Specifications |                |                                  |              |         |
|----------------|----------------|----------------------------------|--------------|---------|
| Unit           | Weight OZ (gm) | Max Working Pressure PSIG (barg) | Wetted Parts | Seals   |
| Teflon®        | 4 (113.4)      | 80 (5.52)                        | Teflon®      | Teflon® |
| Brass          | 12 (340.2)     | 1500 (103.42)                    | Brass, Epoxy | Viton®  |
| 316SS          | 12 (340.2)     | 3000 (206.84)                    | 316SS, Epoxy | Viton®  |



## Calibration Table

| Model |         | Air SCC/M (SCFH) | Water ML/M (GPH) | Ports FNPT |
|-------|---------|------------------|------------------|------------|
| 125   | Minimum | 30 (0.063)       | 1 (0.016)        | 1/8"       |
|       | Minimum | 16000 (33.90)    | 500 (7.93)       |            |

## Pressure Loss

| Air Flowrate SCC/M (SCFH) | Water Flowrate ML/M (GPH) | ΔP to Atmosphere MBARS (Inches of Water) |
|---------------------------|---------------------------|--|
| 30 (.064)                 | 1 (0.016)                 | 8.71 (3.50)                              |
| 310 (.657)                | 30 (0.48)                 | 25.8 (10.38)                             |
| 1500 (3.178)              | 300 (4.76)                | 29.7 (11.92)                             |
| 16000 (33.9)              | 500 (7.93)                | 63.8 (25.63)                             |






\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# 125 Series

Standard Unobtrusive Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070  |
|---|---|---|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |

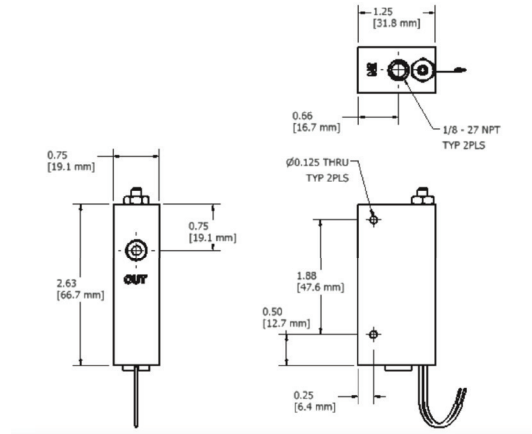

## Installation

Mount with the inlet port up vertically. Inlet port down changes the adjustable range of the unit. A 10 micron filter is recommended.

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Materials                             | Electrical Conduit (Optional)        | Switch   | Options  |
|-------|---------------------------------------|--------------------------------------|--|--|
| 125   | T Teflon®<br>B Brass<br>316 Stainless | C (Metallic Bodies Only) (1/2" FNPT) | N.O. Single Pole Single Throw Normally Open<br><br>SPDT Single Pole Double Throw | TFE Teflon Encapsulated Piston**<br><br>02 Oxygen Cleaned<br><br>HT High Temperature Options 340°F (171°C) metallic body only<br><br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>BN Buna N Seals<br>FP Factory Preset |

\*Consult Factory \*\*Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# 125 BP Series

Bypass Adjustable Flow Monitor

## Key Features

Best for applications where the ratio (Normal Flow/Set Point) is 10:1 or less.

## Features

- Broad Range of Adjustability
- Compact Size
- High Resolution
- Close On-Off Differential
- Ease of Customer Setting
- Monitors Gases or Liquids
- Materials: 316SS, Brass or Teflon®
- Confirms: Normal Flow Conditions
- Senses: High Flow and Low Flow Conditions
- Output: Switch Contact

## Applications

- Vacuum Systems
- Wet Stations
- Gas Analyzers
- Cooling Systems
- Industrial Fluid Lines
- Process Flows

## Operation

When no flow is present the free magnetic piston rests on the bottom of the bore, which is in a bypass off the main line. Adjustment of the orifice in the main line creates a small bypass flow to lift the magnetic piston and actuate the reed switch. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path. When flow decreases, the piston moves downward and the reed switch deactuates.


- Actuation Points for air at 68°F and 14.7 PSIA with increasing flow
- Deactuation (decreasing flow) averages 10% less than actuation (increasing flow)
- Repeatability ±2%
- Unit will pass greater flows

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C)
- For other temperature ranges consult factory.

| Specifications |                |                                  |              |         |
|----------------|----------------|----------------------------------|--------------|---------|
| Unit           | Weight OZ (gm) | Max Working Pressure PSIG (barg) | Wetted Parts | Seals   |
| Teflon®        | 4.4 (123.5)    | 100 (6.89)                       | Teflon®      | Teflon® |
| Brass          | 16 (453.6)     | 1500 (103.42)                    | Brass, Epoxy | Viton®  |
| 316SS          | 16 (453.6)     | 3000 (206.84)                    | 316SS, Epoxy | Viton®  |

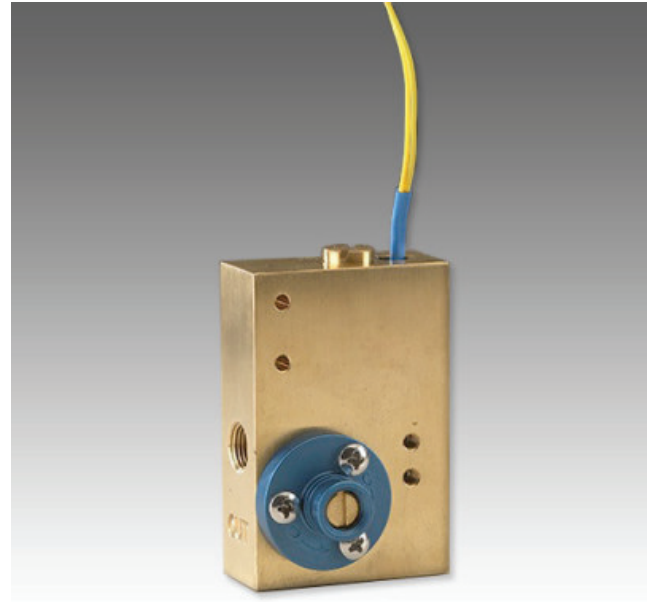

## Calibration Table

| Model    |         | Air SCC/M (SCFH) | Water ML/M (GPH) | Ports FNPT |
|----------|---------|------------------|------------------|------------|
| 125 BP   | Minimum | 100 (0.21)       | 3 (0.048)        | 1/8"       |
|          | Maximum | 20000 (42.4)     | 500 (7.93)       |            |
| 125 BPHF | Minimum | 200 (0.42)       | 5 (0.079)        | 1/8"       |
|          | Maximum | 60000 (127)*     | 950 (15.105)     |            |

## Pressure Loss

| Air Flowrate SCC/M (SCFH) | Water Flowrate ML/M (GPH) | ΔP to Atmosphere MBARS (Inches of Water) |
|---------------------------|---------------------------|--|
| 100 (.21)                 | 3 (0.048)                 | 1.2 (0.5)                                |
| 5500 (11.7)               | 200 (3.17)                | 9.3 (3.71)                               |
| 7000 (14.8)               | 400 (6.34)                | 11.7 (4.71)                              |
| 20000 (42.4)              | 500 (7.93)                | 24.7 (9.93)                              |
| 60000 (127.1)             | 950 (15.10)               | 69.7 (28.0)                              |

\*At 60 PSIG (4.137 BARG)






\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# 125 BP Series

Bypass Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File E471070   | SPDT<br>UL File #E471070  |
|---|---|---|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |

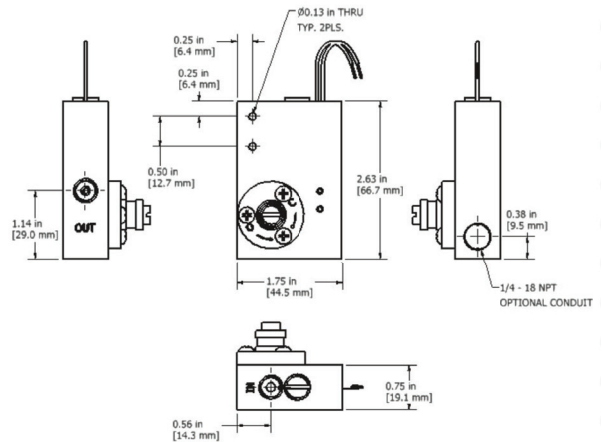

## Installation

Mount vertically with the inlet port at bottom. A 10 micron filter is recommended.

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model  | Materials                             | By Pass Design           | Electrical Conduit                      | Switch  | Options  |
|--------|---------------------------------------|--------------------------|---|---|--|
| 125 BP | T Teflon®<br>B Brass<br>316 Stainless | BP Bypass                | C (1/4 FNPT)<br>Blank for Standard Unit | N.O. Single Pole<br>Single Throw<br>Normally Open | TFE Teflon Encapsulated<br>Piston**  |
|        |                                       | BPHF Bypass<br>High Flow |   | SPDT Single Pole<br>Double Throw                  | O2 Oxygen Cleaned<br>HT High Temperature<br>Options 340°F (171°C)<br>metallic body only<br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>BN Buna N Seals<br>FP Factory Preset |

\*Consult Factory \*\*Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# 500 BP Series

Bypass Adjustable Flow Monitor

## Key Features


Best for applications where the ratio (Normal Flow/Set Point) is 10:1 or less.

## Features

- Low Minimum Operating Pressure
- Close On-Off Differential
- Ease of adjustability
- In Line 180 Degree Porting
- Monitors Gases or Liquids
- Confirms: Normal Flow Conditions
- Senses: High Flow and Low Flow Conditions
- Materials: 316SS, Brass
- Output: Switch Contact

## Applications

- Vacuum Systems
- Wet Stations
- Shipboard Water Systems
- CVD Furnaces Cooling Water
- Biomedical Instruments
- Coolant Failure Alarm

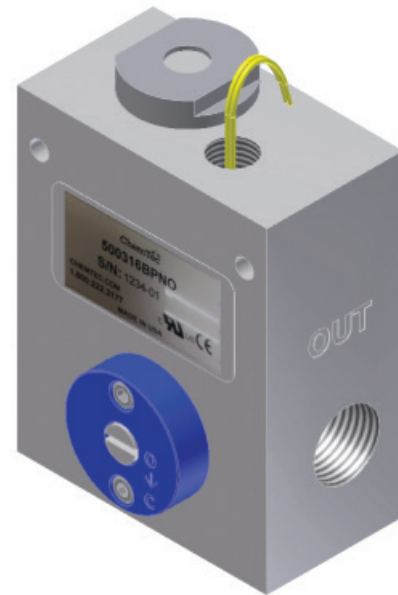

## Operation

With no flow present, the magnetic piston rests on the bottom of the bypass bore. When flow is established the piston is forced upward by the bypass flow and actuates the reed switch. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path. The bypass flow is controlled by manual adjustment of the flow control vane. When flow decreases the piston moves downward and the reed switch deactuates.

- Actuation Points for air at 68° F and 14.7 PSIA with increasing flow
- Deactuation (decreasing flow) averages 10% less than actuation (increasing flow)
- Repeatability  $\pm 2\%$
- Unit will pass greater flows

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C )
- For other temperature ranges consult factory.

| Specifications |                |                                  |              |         |
|----------------|----------------|----------------------------------|--------------|---------|
| Unit           | Weight Lb (kg) | Max Working Pressure PSIG (barg) | Wetted Parts | Seals   |
| Teflon®        | 1.5 (0.68)     | 80 (5.51)                        | Teflon®      | Teflon® |
| Brass          | 4 (1.81)       | 1500 (103.42)                    | Brass, Epoxy | Viton®  |
| 316SS          | 4 (1.81)       | 3000 (206.84)                    | 316SS, Epoxy | Viton®  |

## Calibration Table

| Model    |         | Air SLPM (SCFM) | Water LPM (GPM) | Ports FNPT |
|----------|---------|-----------------|-----------------|------------|
| 500 BP   | Minimum | 6 (0.20)        | 0.11 (0.03)     | 1/2"       |
|          | Maximum | 991 (35)        | 15.14 (4)       |            |
| 500 BPHF | Minimum | 23 (0.80)       | 0.38 (0.10)     | 1/2"       |
|          | Maximum | 2124 (75)       | 37.85 (10)      |            |

## Pressure Loss

| Air Flowrate SLPM (SCFM) | Water Flowrate LPM (GPM) | $\Delta P$ to Atmosphere MBARS (PSID) |
|--------------------------|--------------------------|---------------------------------------|
| 84.9 (3)                 | 3.8 (1)                  | 17.2 (0.25)                           |
| 566 (20)                 | 15.1 (4)                 | 51.7 (0.75)                           |
| 1,557 (55)               | 30.3 (8)                 | 233 (3.38)                            |
| 1925.5 (68)              | 37.9 (10)                | 362 (5.25)                            |
| 2265.3 (80)              | 64.4 (17)                | 517 (7.50)                            |






\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# 500 BP Series

## Bypass Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070  |
|---|---|---|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |

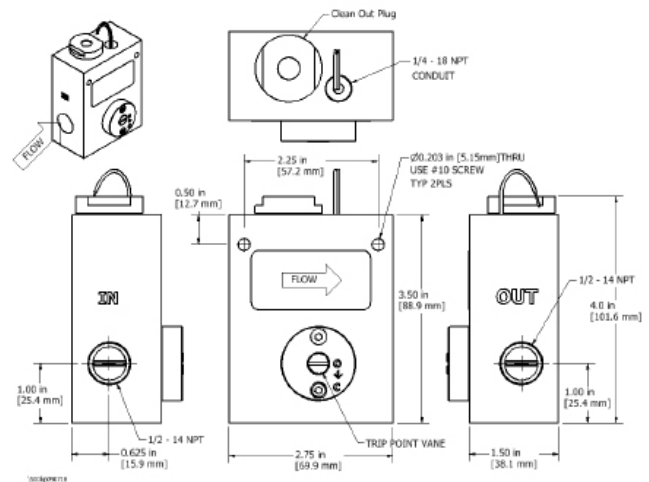

### Installation

Mount vertically (leads up) with horizontal piping. A 100 micron filter is recommended.

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size          | Materials                   | By Pass Design           | Switch  | Options   |
|-------|---------------|-----------------------------|--------------------------|---|---|
| 500   | T<br>B<br>316 | Teflon@**<br>Brass<br>316SS | BP Bypass                | N.O. Single Pole<br>Single Throw<br>Normally Open | TFE Teflon@ Encapsulated Piston **  |
|       |               |                             | BPHF Bypass<br>High Flow | SPDT Single Pole<br>Double Throw                  | 02 Oxygen Cleaned<br>HT High Temperature Options 340°F (171°C)<br>metallic body only<br><br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>BN Buna N Seals<br>FP Factory Preset |

\*Consult Factory \*\*Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

### Key Features

Best for applications where the ratio (Normal Flow/ Set Point) is 10:1 or Greater, Minimal Pressure Drop.

### Features

- Broad Range of Adjustability
- Compact Size
- High Resolution
- Materials: 316S S, Brass or Teflon®

### Applications

- Welding Systems
- Analyzers
- Vacuum Systems
- Cooling Systems

### Operation

When flow is increased, the magnetic piston is forced against a bias spring. As the magnet comes near the adjustable reed switch it actuates, indicating proper flow. When flow decreases the spring forces the piston in the opposite direction deactuating the reed switch an indicating a reduced or no flow situation. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path.

- All models field adjustable
- Deactuation (decreasing flow) averages 40% less than actuation (increasing flow)
- Repeatability ± 2%
- Correction must be made for attitudes other than horizontal
- Unit will pass greater flows

| Specifications |                 |                                  |                     |
|----------------|-----------------|----------------------------------|---------------------|
| Model          | Weight Lbs (kg) | Max Working Pressure PSIG (barg) | Wetted Parts        |
| LCA-250-P      | 0.375 (0.17)    | 100 (6.89)                       | PVC, Epoxy, 316SS   |
| LCA-250-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| LCA-250-S      | 1.4 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| LCA-375-P      | 0.375 (0.17)    | 100 (6.89)                       | PVC, Epoxy, 316SS   |
| LCA-375-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| LCA-375-S      | 1.4 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| LCA-500-P      | 0.375 (0.17)    | 100 (6.89)                       | PVC, Epoxy, 316SS   |
| LCA-500-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| LCA-500-S      | 1.4 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| LCA-750-P      | 0.625 (0.283)   | 100 (6.89)                       | PVC, Epoxy, 316SS   |
| LCA-750-B      | 1.7 (0.771)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| LCA-750-S      | 1.7 (0.771)     | 3000 (206.84)                    | 316SS, Epoxy        |



### Calibration Range

| Model    | Air LPM (SCFM)           | Adjustable Range Increasing Flow Water LPM (GPM) | Inlet/Outlet FNPT Port Inches |
|----------|--------------------------|--|-------------------------------|
| LCA-250* | 14.16 (0.5)<br>1416 (50) | 0.38-15.1<br>(0.10 - 4)                          | 1/4"                          |
| LCA-375* | 14.16 (0.5)<br>1416 (50) | 1.89-15.1<br>(0.5 - 4)                           | 3/8"                          |
| LCA-500* | 28.32 (1)<br>2124 (75)   | 1.89 - 37.9<br>(0.5 - 10)                        | 1/2"                          |
| LCA-750* | 141.6 (5)<br>3398 (120)  | 3.79 - 56.8<br>(1 - 15)                          | 3/4"                          |

### Pressure Loss

| Model       | Air LPM (SCFM) | Water LPM (GPM) | ΔP BARD (PSID) |
|-------------|----------------|-----------------|----------------|
| LCA-250/375 |                |                 |                |
| Minimum     | 14.16 (0.5)    | 0.38 (0.10)     | 0.34 (0.5)     |
| Maximum     | 1416 (50)      | 15.14 (4)       | 0.21 (3)       |
| LCA-500     |                |                 |                |
| Minimum     | 28.32 (1)      | 1.89 (0.5)      | 0.069 (1)      |
| Maximum     | 2124 (75)      | 37.85 (10)      | 0.689 (10)     |
| LCA-750     |                |                 |                |
| Minimum     | 141.6 (5)      | 3.79 (1)        | 0.10 (1.5)     |
| Maximum     | 3398 (120)     | 56.8 (15)       | 0.62 (9)       |


### Temperature Operating Range



- 0° to 228°F (-17° to 104°C) for Brass and Stainless Steel
  - 32° to 120°F (0° to 49°C) for PVC
  - 32° to 120°F for Acrylic
- For other temperature ranges consult factory



\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.
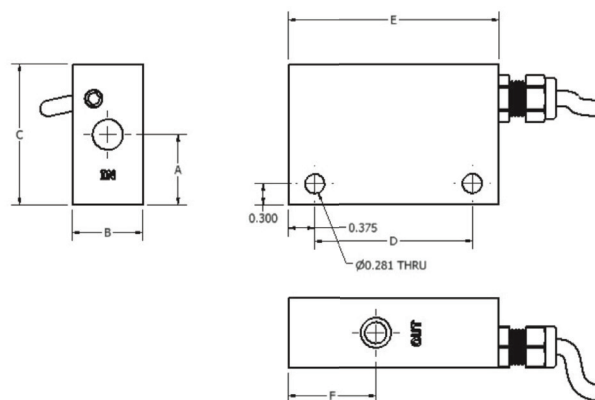
| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |



| Leads   | SPST<br>UL File #E471070   | SPDT<br>UL File #E471070 |
|---|--|--------------------------|
|  <p>leads 39 in. min. from body 22 AWG, PVC Jacketed Wired</p> |  <p>leads 39 in. min from body 22 AWG PVC jacketed wired</p> <ul style="list-style-type: none"> <li>• red - N.C.</li> <li>• green - N.O.</li> <li>• black - Common</li> </ul> |                          |

### Installation

Mount with the inlet port on the side horizontally. Other attitudes change the adjustable range of the unit. A 100 micron filter is recommended.

| Dimensions |             |             |             |              |             |             |
|------------|-------------|-------------|-------------|--------------|-------------|-------------|
| Model      | A           | B           | C           | D            | E           | F           |
| LCA-250    | 1.00 (25.4) | 1.00 (25.4) | 2.00 (50.8) | 2.25 (57.15) | 3.0 (76.2)  | 1.25 (31.8) |
| LCA-375    | 1.00 (25.4) | 1.00 (25.4) | 2.00 (50.8) | 2.25 (57.15) | 3.0 (76.2)  | 1.25 (31.8) |
| LCA-500    | 1.00 (25.4) | 1.00 (25.4) | 2.00 (50.8) | 2.25 (57.15) | 3.0 (76.2)  | 1.25 (31.8) |
| LCA-750    | 1.63 (41.4) | 1.25 (31.8) | 2.75 (69.9) | 3.25 (82.55) | 4.0 (101.6) | 1.63 (41.4) |

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model   | Materials | Type of Service | Switch                        |
|---------|-----------|-----------------|-------------------------------|
| LCA 250 | P PVC     | W Water         | N.O. Normally Open            |
| 375     | A Acrylic | G Gas           | SPDT Single Pole Double Throw |
| 500     | B Brass   |                 | FP* Factory Preset            |
| 750     | S 316SS   |                 |                               |

\*Consult Factory

All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.



# FAV Series

Adjustable Flow Monitor

## Key Features


Best for applications where the normal flow to set point is 10:1 or greater.

## Features

- Adjustable Flow Monitor
- Monitors both Gases and Liquids
- Materials: Brass or 316SS
- Confirms: Normal Flow Conditions
- Senses: High Flow or Low Flow Conditions
- Output: Switch Contact

## Applications

- Process Controls
- Fire Control Systems
- Water Treatment Chemicals
- Cooling Systems
- Heat Pumps
- Hydraulic Lifts
- Industrial Analyzers
- Plant Safety



## Operation

When flow is increased, the magnetic piston is forced against a bias spring. As the magnet comes near the adjustable reed switch it actuates, indicating proper flow. When flow decreases the spring forces the piston in the opposite direction deactuating the reed switch and indicating a reduce or no flow condition. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path.

- Actuation points for air at 68 F and 14.7 PSIA with increasing flow.
- Deactuation (decreasing flow) averages 40% less than actuation (increasing flow)
- Repeatability  $\pm 2\%$
- Unit will pass greater flows

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

| Specifications |                 |                                  |                     |
|----------------|-----------------|----------------------------------|---------------------|
| Model          | Weight Lbs (kg) | Max Working Pressure PSIG (barg) | Wetted Parts        |
| FAV-250-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| FAV-250-S      | 1.4 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| FAV-375-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| FAV-375-S      | 1.4 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| FAV-500-B      | 1.4 (0.635)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| FAV-500-S      | 1.7 (0.635)     | 3000 (206.84)                    | 316SS, Epoxy        |
| FAV-750-B      | 1.7 (0.771)     | 1500 (103.42)                    | Brass, Epoxy, 316SS |
| FAV-750-S      | 1.7 (0.771)     | 3000 (206.84)                    | 316SS, Epoxy        |

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C) for Brass and Stainless Steel
- For other temperature ranges consult factory.

## Calibration Range

| Model   | Air SLPM (SCFM) | Water LPM (GPM) | Inlet/Outlet FNPT Port Inches |
|---------|-----------------|-----------------|-------------------------------|
| FAV-250 |                 |                 | 1/4"                          |
| Minimum | 14.16 (0.5)     | 0.38 (0.10)     |                               |
| Maximum | 1416 (50)       | 15.14 (4)       |                               |
| FAV-375 |                 |                 | 3/8"                          |
| Minimum | 14.16 (0.5)     | 0.38 (0.10)     |                               |
| Maximum | 1416 (50)       | 15.14 (4)       |                               |
| FAV-500 |                 |                 | 1/2"                          |
| Minimum | 28.32 (1)       | 1.89 (0.5)      |                               |
| Maximum | 2124 (75)       | 37.85 (10)      |                               |
| FAV-750 |                 |                 | 3/4"                          |
| Minimum | 141.6 (5)       | 3.78 (1)        |                               |
| Maximum | 3398 (120)      | 75.7 (20)       |                               |



## Pressure Loss


| Model       | Air Flow Rate SLPM (SCFM) | Water Flowrate LPM (GPM) | $\Delta P$ to Atmosphere BARD (PSID) |
|-------------|---------------------------|--------------------------|--------------------------------------|
| FAV-250/375 |                           |                          |                                      |
| Minimum     | 14.2 (0.5)                | 0.38 (0.10)              | 0.34 (0.5)                           |
| Maximum     | 1416 (50)                 | 15.14 (4)                | 0.21 (3)                             |
| FAV-500     |                           |                          |                                      |
| Minimum     | 28.32 (1)                 | 1.89 (0.5)               | 0.069 (1)                            |
| Maximum     | 2124 (75)                 | 37.85 (10)               | 0.689 (10)                           |
| FAV-750     |                           |                          |                                      |
| Minimum     | 141.6 (5)                 | 3.78 (1)                 | 0.10 (1.5)                           |
| Maximum     | 3398 (120)                | 75.7 (20)                | 0.62 (9)                             |



\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |

| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070 |
|---|---|--------------------------|
|  <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> |  <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul> |                          |

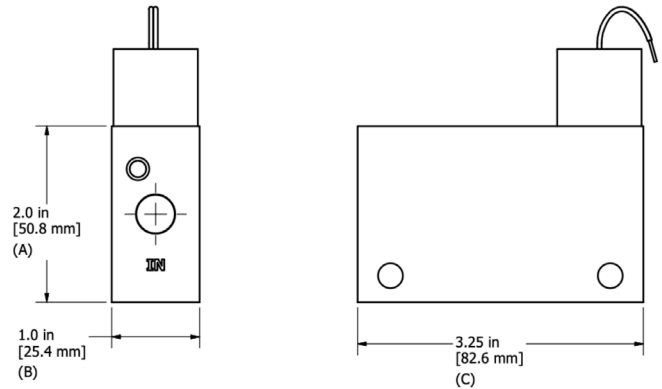

### Installation

Mount with the inlet port on the side horizontally. Other attitudes change the adjustable range of the unit. A 100 micron filter is recommended.

### Dimensions

| Model   | A           | B (Metal)   | B (Plastic)    | C           |
|---------|-------------|-------------|----------------|-------------|
| FAV-250 | 2.0 (50.8)  | 1.00 (25.4) | 1.25 (31.75)   | 3.25 (82.6) |
| FAV-375 | 2.0 (50.8)  | 1.00 (25.4) | 1.25 (31.75)   | 3.25 (82.6) |
| FAV-500 | 2.0 (50.8)  | 1.00 (25.4) | 1.375 (34.925) | 3.25 (82.6) |
| FAV-750 | 2.75 (69.9) | 1.25 (31.8) | 1.50 (38.1)    | 4.25 (108)  |

### How to Order

Sales@ChemTec.com | 800.222.2177

| Model                        | Materials          | Type of Service  | Switch  | Options   |
|------------------------------|--------------------|------------------|---|---|
| FAV 250<br>375<br>500<br>750 | B Brass<br>S 316SS | W Water<br>G Gas | N.O. Normally Open<br>SPDT Single Pole Double Throw | HT High Temperature Options 340 ° F (171°C)<br>FP* Factory Preset |

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# CCM Series

Standard Unobtrusive Adjustable Flow Monitor

## Key Features

Best for applications where the ratio (Normal Flow/Set Point) is 10:1 or Greater, Minimal Pressure Drop.

## Features

- Adjustable Flow Monitor
- High Resolution
- Works in Very Low Flow Environments
- Minimal Pressure Drop
- Gas and Liquid Flow Sensor
- Materials: PVC
- Confirms: Normal Flow Conditions
- Senses: High Flow, Low Flow
- Output: Switch Contact

## Applications

- Gas Chromatography
- Analyzers
- Filter Maintenance
- Metering Equipment
- Corrosive Chemicals
- Gas Generators

## Operation

With no flow present, the magnetic piston is held at the flow tube inlet by magnetic repulsion of the fixed magnet at the opposite end. As flow is established the piston is displaced toward the magnetic end plug and a major portion of the flow is bypassed through the flow tube orifice into the annular space. At the adjustment point the magnetic piston actuates the reed switch. On decreasing flow the switch deactuates. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path.

- Actuation points for air at 68°F and 14.7 PSIA with increasing flow
- Deactuation (decreasing flow) averages 40% less than actuation (increasing flow)
- Repeatability ±2%
- Unit will pass greater flows


Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Operation

Inlet 1/8" FNPT|Outlet 1/4" FNPT

## Temperature Operating Range

• 32° to 140°F (0° to 60°C) for PVC  
For other temperature ranges consult factory.

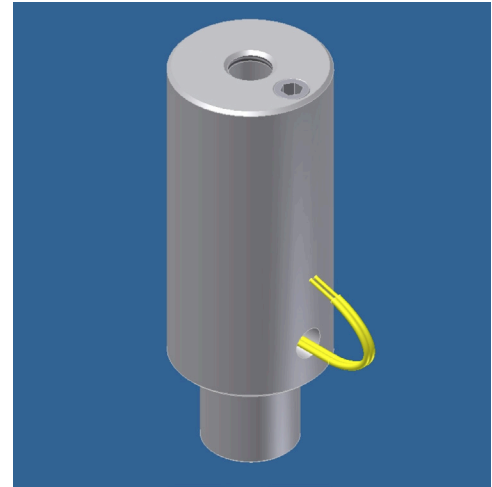

## Calibration Range

| Model   | Air SCC/M (SCFH) | Water ML/M (GPH) | ΔP to Atmosphere MBARS (Inches in Water) |
|---------|------------------|------------------|--|
| CCM-00  |                  |                  |  |
| Minimum | 10 (0.021)       | 1 (0.016)        | 2.49 (1.0)                               |
| Maximum | 150 (0.32)       | 5 (0.08)         | 19.0 (8.0)                               |
| CCM-010 |                  |                  |  |
| Minimum | 150 (0.32)       | 8 (0.13)         | 0.99 (0.4)                               |
| Maximum | 1000 (2.12)      | 180 (2.9)        | 17.4 (7.0)                               |
| CCM-015 |                  |                  |  |
| Minimum | 500 (1.06)       | 20 (0.32)        | 1.74 ( 0.7)                              |
| Maximum | 6000 (12.7)      | 370 (5.9)        | 19.9 (8.0)                               |
| CCM-125 |                  |                  |  |
| Minimum | 6000 (12.7)      | 65 (1.03)        | 3.73 (1.5)                               |
| Maximum | 16000 (33.9)     | 5000 (7.9)       | 12.4 (5.0)                               |

## Specifications



| Body Material | Weight OZ (gm) | Max Working Pressure PSIG (barg) | Wetted Parts | Seals  |
|---------------|----------------|----------------------------------|--------------|--------|
| PVC           | 6oz (170 gm)   | 100 (6.89)                       | PVC, Epoxy   | Buna N |

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# CCM Series

Standard Unobtrusive Adjustable Flow Monitor

| Switch Data                   | SPST | SPDT |
|-------------------------------|------|------|
| Maximum Switching Voltage     |      |      |
| DC (V)                        | 250  | 175  |
| AC (V)                        | 265  | 120  |
| Contact Rating                |      |      |
| DC (W)                        | 50   | 5    |
| AC (VA)                       | 50   | 5    |
| Maximum Switching Current (A) |      |      |
| DC (A)                        | 1.5  | 0.25 |
| AC (A)                        | 1.1  | 0.18 |



| Leads   | SPST<br>UL File #E471070  | SPDT<br>UL File #E471070  |
|---|---|---|
| <p>leads 18 in. min. from body 22 AWG, TFE insulation</p> | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.O.</li> <li>• blue - N.C.</li> <li>• white - Common</li> </ul> | <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.O.</li> <li>• blue - N.C.</li> <li>• white - Common</li> </ul> |

## Installation

Mount with the inlet port up vertically. A 10 micron filter is recommended

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size | Switch                        | Options                         |
|-------|------|-------------------------------|---------------------------------|
| CCM   | -00  | N.C. Normally Closed          | TFE Teflon® Encapsulated Piston |
|       | -010 |                               | KZ FFKM Perfluoroelastomer      |
|       | -015 | SPDT Single Pole Double Throw | EPR EPR Seals                   |
|       | -125 |                               | FP Factory Preset               |

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# MAO Series

125/250 Flow Meter

## Key Features

All Teflon® wetted parts model available. No seals. Undamaged by over ranging.

## Features

- No Bearings
- Single Moving Part
- In Line Metering
- No Rotating Internals
- Materials: 316SS, Brass or Teflon®
- Output: Analog, Digital and Current loop
- Measures Low Flows

## Applications

- Wet Benches
- Cooling Systems
- Corrosive Chemical Dispensing
- Materials Consumption Measurement
- Process Controls
- Patent No's 4,858,647 4,905,844 5,033,311
- Others may apply.



## Operation

When fluid flows through the unit it displaces the Teflon encapsulated magnetic piston. This displacement is proportional to the volumetric flow through the unit. A transducer, encapsulated in the body outside the fluid path, senses the displacement of the piston. The transducer's signal is converted by a microprocessor-based conditioning circuit then sends the signal to three types of outputs: voltage, pulse and current loop.

- Total accuracy: ±5%
- Repeatability: ±2% full scale
- Linearity: ±2% full scale

## Temperature Operating Range

- Ambient: 0° to 125°F (-18° to 52°C)
- Media: 0° to 180°F (-18° to 82°C)

| Specifications |                   |                                  |                |
|----------------|-------------------|----------------------------------|----------------|
| Model          | Weight Lbs. (Kg.) | Max Working Pressure PSIG (barg) | Wetted Parts   |
| MAO-125/250-T  | 0.63 (0.29)       | 80 (5.51)                        | Teflon®        |
| MAO-125/250-B  | 1.30 (0.59)       | 1500 (103.42)                    | Brass, Teflon® |
| MAO-125/250-S  | 1.30 (0.59)       | 3000 (206.84)                    | 316SS, Teflon® |

| Pressure Loss |         |                         |                 |
|---------------|---------|-------------------------|-----------------|
| Model         | Min/Max | Linear Range ML/M (GPH) | ΔP MBARS (PSID) |
| MAO-125-AA    | Minimum | 20 (0.32)               | 24.82 (0.36)    |
|               | Maximum | 70 (1.11)               | 42.06 (0.61)    |
| MAO-125-BB    | Minimum | 50 (0.79)               | 8.27 (0.12)     |
|               | Maximum | 150 (0.79)              | 10.34 (0.15)    |
| MAO-250-AA    | Minimum | 100 (1.59)              | 8.27 (0.12)     |
|               | Maximum | 500 (7.93)              | 9.65 (0.14)     |
| MAO-250-BB    | Minimum | 260 (4.12)              | 10.34 (0.15)    |
|               | Maximum | 1800 (28.54)            | 20 (0.29)       |

## Calibration in Water

| Model      | ML/MIN (GPH)   | VDC | Hz  | mA | Ports FNPT |
|------------|----------------|-----|-----|----|------------|
| MAO-125XAA | 0              | 0   | 0   | 0  | 1/8"       |
|            | 20 (0.317)     | 1   | 40  | 4  |            |
|            | 32.5 (0.5151)  | 2   | 80  | 8  |            |
|            | 45 (0.7133)    | 3   | 120 | 12 |            |
|            | 57.5 (0.9114)  | 4   | 160 | 16 |            |
| MAO-125XBB | 70 (1.1095)    | 5   | 200 | 20 | 1/8"       |
|            | 0              | 0   | 0   | 0  |            |
|            | 50 (0.7925)    | 1   | 40  | 4  |            |
|            | 75 (1.1888)    | 2   | 80  | 8  |            |
|            | 100 (1.585)    | 3   | 120 | 12 |            |
| MAO-250XAA | 125 (1.9813)   | 4   | 160 | 16 | 1/4"       |
|            | 150 (2.3775)   | 5   | 200 | 20 |            |
|            | 0              | 0   | 0   | 0  |            |
|            | 100 (1.585)    | 1   | 40  | 4  |            |
|            | 200 (3.1701)   | 2   | 80  | 8  |            |
| MAO-250XBB | 300 (4.7551)   | 3   | 120 | 12 | 1/4"       |
|            | 400 (6.3401)   | 4   | 160 | 16 |            |
|            | 500 (7.9252)   | 5   | 200 | 20 |            |
|            | 0              | 0   | 0   | 0  |            |
|            | 250 (3.9626)   | 1   | 40  | 4  |            |
| MAO-250XBB | 638 (10.1125)  | 2   | 80  | 8  | 1/4"       |
|            | 1025 (16.2466) | 3   | 120 | 12 |            |
|            | 1413 (22.3965) | 4   | 160 | 16 |            |
|            | 1800 (28.5306) | 5   | 200 | 20 |            |

CE

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

### Electrical Specifications

**POWER REQUIREMENTS:**

Voltage: Regulated 15 – 30 VDC  
 Current: 250 mA

**OUTPUTS:**

ANALOG: 0 – 5 VDC  
 Minimum Load Impedance: 5k ohm in parallel with 250pf

**DIGITAL:**


200 Hz, Square wave 50% duty cycle TTL compatible output.

**CURRENT LOOP:**

Current Loop: 4 - 20 mA  
 Loop Load : 100Ω ±1% 1/4 watt

**WIRE CONNECTION:**

- Red – (+)
- Black – (Common)
- White – (Frequency)
- Green – (Voltage)
- Brown – (Current)

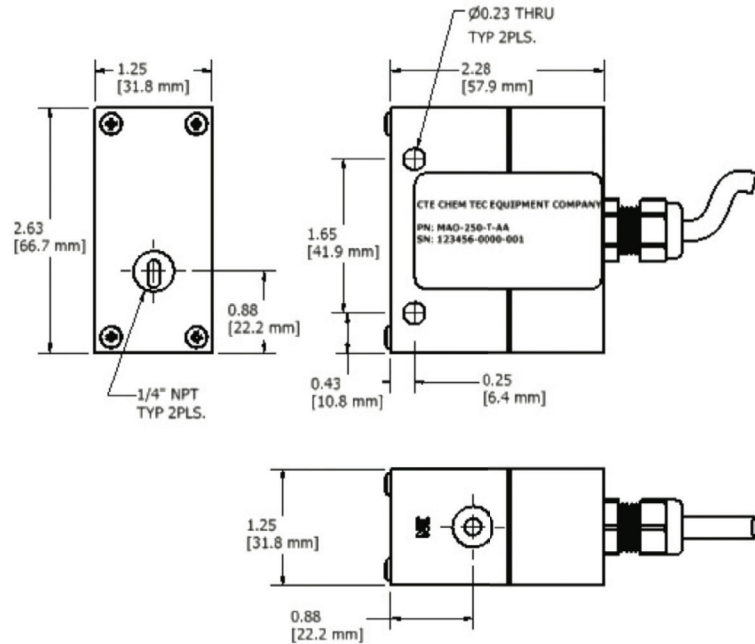

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size       | Switch                                    | Options                 |
|-------|------------|---|-------------------------|
| MAO   | 125<br>250 | T Teflon®<br>B Brass<br>S Stainless Steel | (See Chart)<br>AA<br>BB |

\*Consult Factory \*\*Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
 All dimensions are subject to change for quality improvement. Not responsible for printing errors.

### Installation

Control valves should be placed downstream of the MAO flow meter. The flow meter should never be installed so that it drains completely when flow ceases. When particles may be present in the media, a filter should be installed ahead of the flow meter. It is advisable to filter to 10 microns. The MAO flow meter should not be located near ferrous material or near strong electro-magnetic fields.

The MAO flow meter is sensitive to velocity profile disturbances in the flow stream. It is advisable that straight lengths of 10 inside diameters upstream and 5 inside diameters downstream be used. All lines should be completely purged of air before use. The use of pipe paste is not recommended. Use care when using Teflon tape to avoid shreds from entering the MAO flow meter.

### Mounting

Mount with INLET vertical, port facing down. OUTLET port horizontal.

*\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.*

# MAO Series

500 Flow Meter

## Key Features

All Teflon® wetted parts model available. No seals. Undamaged by over ranging.

## Features

- No Bearings
- Single Moving Part
- In Line Metering
- No Rotating Internals
- Materials: 316SS, Brass or Teflon®
- Output: Analog, Digital and Current loop
- Measures Low Flows

## Applications

- Wet Benches
  - Cooling Systems
  - Corrosive Chemical Dispensing
  - Materials Consumption Measurement
  - Process Controls
- Patent No's  
4,858,647  
4,905,844  
5,033,311  
Others may apply.



## Operation

When fluid flows through the unit it displaces the Teflon encapsulated magnetic piston. This displacement is proportional to the volumetric flow through the unit. A transducer, encapsulated in the body outside the fluid path, senses the displacement of the piston. The transducer's signal is converted by a microprocessor-based conditioning circuit then sends the signal to three types of outputs: voltage, pulse and current loop.

- Total Accuracy: ±5%
- Repeatability: ±2% Full Scale
- Linearity: ±2% Full Scale

## Temperature Operating Range

- AMBIENT: 0° to 125°F (-18° to 52°C)
- MEDIA: 0° to 180° F (-18° to 82°C)

| Specifications |                   |                                  |                |
|----------------|-------------------|----------------------------------|----------------|
| Model          | Weight Lbs. (Kg.) | Max Working Pressure PSIG (barg) | Wetted Parts   |
| MAO-500-T      | 1.3 (0.6)         | 80 (5.51)                        | Teflon®        |
| MAO-500-B      | 3.4 (1.54)        | 1500 (103.42)                    | Brass, Teflon® |
| MAO-500-S      | 3.4 (1.54)        | 3000 (206.84)                    | 316SS, Teflon® |

| Pressure Loss |                        |                 |
|---------------|------------------------|-----------------|
| Model         | Linear Range LPM (GPM) | ΔP MBARS (PSID) |
| MAO-500-AA    | 1.89 (0.5)             | 247.58 (0.4)    |
|               | 7.57 (2.0)             | 31.03 (0.45)    |
| MAO-500-BB    | 3.79 (1.0)             | 27.58 (0.40)    |
|               | 13.25 (3.5)            | 68.95 (1.0)     |

| Calibration in Water |             |     |     |    |            |
|----------------------|-------------|-----|-----|----|------------|
| Model                | GPM (LPM)   | VDC | Hz  | mA | Ports FNPT |
| MAO-500XAA           | 0           | 0   | 0   | 0  | 1/2"       |
|                      | 0.5 (1.89)  | 1   | 40  | 4  |            |
|                      | 0.75 (2.84) | 2   | 80  | 8  |            |
|                      | 1.25 (4.73) | 3   | 120 | 12 |            |
|                      | 1.75 (6.62) | 4   | 160 | 16 |            |
|                      | 2 (7.57)    | 5   | 200 | 20 |            |
| MAO-500XBB           | 0           | 0   | 0   | 0  | 1/2"       |
|                      | 1 (3.79)    | 1   | 40  | 4  |            |
|                      | 1.6 (6.06)  | 2   | 80  | 8  |            |
|                      | 2.2 (8.33)  | 3   | 120 | 12 |            |
|                      | 2.8 (10.6)  | 4   | 160 | 16 |            |
|                      | 3.5 (13.25) | 5   | 200 | 20 |            |

CE

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

### Electrical Specifications


**POWER REQUIREMENTS:**  
 Voltage: Regulated 15 – 30 VDC  
 Current: 250 mA

**OUTPUTS:**  
 ANALOG: 0 – 5 VDC  
 Minimum Load Impedance: 5k ohm in parallel with 250pf

**DIGITAL:**  
 200 Hz, Square wave 50% duty cycle TTL compatible output

**CURRENT LOOP:**  
 Current Loop: 4 - 20 mA  
 Loop Load : 100Ω ±1% 1/ 4 watt

**WIRE CONNECTION:**  
 Red – (+)  
 Black – (Common)  
 White – (Frequency)  
 Green – (Voltage)  
 Brown – (Current)

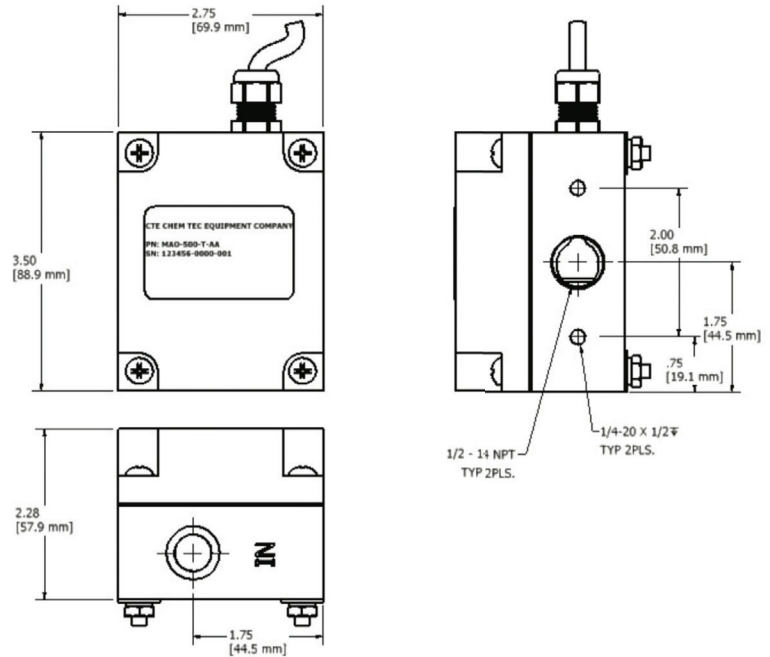

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size | Switch                                    | Options                 |
|-------|------|---|-------------------------|
| MAO   | 500  | T Teflon®<br>B Brass<br>S Stainless Steel | (See Chart)<br>AA<br>BB |

\*Consult Factory \*\*Standard with Teflon unit | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
 All dimensions are subject to change for quality improvement. Not responsible for printing errors.

### Installation

Control valves should be placed downstream of the MAO flow meter. The flow meter should never be installed so that it drains completely when flow ceases.

When particles may be present in the media, a filter should be installed ahead of the flow meter. It is advisable to filter to 10 microns. The MAO flow meter should not be located near ferrous material or near strong electro-magnetic fields.

The MAO flow meter is sensitive to velocity profile disturbances in the flow stream. It is advisable that straight lengths of 10 inside diameters upstream and 5 inside diameters downstream be used.

All lines should be completely purged of air before use.

The use of pipe paste is not recommended. Use care when using Teflon tape to avoid shreds from entering the MAO flow meter.

### Mounting

Mount with INLET vertical, port facing down. OUTLET port horizontal.

*\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.*



# EFV Series

Adjustable Excess Flow Valve

## Key Features

Controls excessive flows.

## Features

- Controlled Bleed, Resets Automatically
- Field Adjustable
- Positive Shut-off
- Function: Restricts or Shuts Off Flow
- Output: Switch Contact Optional
- Materials: 316SS or Brass Body

## Applications

- Fitting Failure
- Regulator failure
- Hydraulic control
- Gas Analyzers
- Toxic Gas and Liquid Releases



## Operation

Flow enters the unit and makes a right angle to the outlet port across the nose of a magnetic piston. The piston is held in place by attraction to an adjusting screw magnet. A pressure differential is created by flow across the piston. When the differential is great enough, the piston slides to a seat at the outlet port. The flow rate at which the piston actuates can be changed externally by turning the adjusting screw, thereby changing the piston's relationship with the flow stream. In this auto reset model after actuation, the piston rests on a metal to metal seat which allows a controlled bleed. To reset the unit, pressure must be equalized on both sides of the piston. If the source is turned off, either upstream or downstream, the bleed will equalize the pressure and the valve will automatically reopen by magnetic repulsion from the fixed magnet located in the valve body.

For positive shut-off an elastomer is used on the nose of the piston. When it comes to rest on the seat it provides a bubble tight closure. To reopen the valve there are two options.

1. The upstream pipeline must be led to atmosphere if the line downstream is at atmosphere.
2. A by-pass line with an on/off valve must be installed to port the upstream pressure to the down-stream pipeline to equalize the pressure.

Our MRS series is available with the by-pass system as an integral part of the unit.

- Actuation points for air at 68°F and 14.7 PSIA.

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Temperature Operating Range

- 0° to 220°F (-17° to 104°C)
- For other temperature ranges consult factory.



## Calibration Range

| Model   | Adjustable Range Air SLPM (SCFM) | Adjustable Range Water LPM (GPM) | PORT FNPT |
|---------|----------------------------------|----------------------------------|-----------|
| EFV-125 | 0.5 to 155.7<br>(0.018 to 5.5)   | 0.015 to 4.5<br>(0.004 to 1.2)   | 1/8"      |
| EFV-250 | 4 to 1132<br>(0.14 to 40)        | 0.100 to 15.1<br>(0.026 to 4.0)  | 1/4"      |
| EFV-375 | 85 to 1840<br>(3.0 to 65)        | 0.380 to 15.1<br>(0.100 to 4.0)  | 3/8"      |
| EFV-500 | 142 to 2123<br>(5.0 to 75)       | 1.90 to 37.8<br>(0.50 to 10.0)   | 1/2"      |
| EFV-750 | 425 to 3681<br>(15.0 to 130)     | 3.80 to 75.7<br>(1.0 to 20.0)    | 3/4"      |


## Pressure Loss


| Model   | Air SLPM (SCFM) | Water LPM (GPM) | ΔP to Atmosphere BARD (PSID) |
|---------|-----------------|-----------------|------------------------------|
| EFV-125 | 0.50 (0.018)    | 0.015 (0.004)   | 0.08 (1.2)                   |
|         | 75 (2.63)       | 2.65 (0.70)     | 0.11 (1.6)                   |
|         | 155 (5.5)       | 4.50 (1.20)     | 0.21 (3.0)                   |
| EFV-250 | 4 (0.14)        | 0.1 (0.26)      | 0.21 (3.0)                   |
|         | 500 (17.50)     | 5.0 (1.32)      | 0.41 (6.0)                   |
|         | 1132 (39.62)    | 15.1 (3.99)     | 0.83 (12.0)                  |
| EFV-375 | 85 (2.98)       | 0.38 (0.10)     | 0.10 (1.5)                   |
|         | 900 (31.50)     | 10.0 (2.64)     | 0.28 (4.0)                   |
|         | 1840 (64.40)    | 15.1 (3.99)     | 0.83 (12.0)                  |
| EFV-500 | 142 (4.97)      | 1.9 (0.50)      | 0.07 (1.0)                   |
|         | 1000 (35.00)    | 25.0 (6.60)     | 0.28 (4.0)                   |
|         | 2123 (74.31)    | 37.8 (9.98)     | 0.48 (7.0)                   |
| EFV-750 | 425 (14.88)     | 3.8 (1.00)      | 0.14 (2.0)                   |
|         | 1800 (63.00)    | 4.7 (1.24)      | 0.21 (3.0)                   |
|         | 3681 (128.84)   | 75.7 (19.98)    | 0.34 (5.0)                   |

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# EFV Series

Adjustable Excess Flow Valve

| ES - Option                   |                          |   |
|-------------------------------|--------------------------|---|
| Switch Data                   | SPST<br>UL File #E471070 | LEADS   |
| Maximum Switching Voltage     |                          |  |
| DC (V)                        | 250                      |   |
| AC (V)                        | 265                      |   |
| Contact Rating                |                          | leads 18 in.<br>min. from body<br>22 AWG, TFE<br>insulation                       |
| DC (W)                        | 50                       |   |
| DC (VA)                       | 50                       |   |
| Maximum Switching Current (A) |                          |   |
| DC (A)                        | 1.5                      |   |
| AC (A)                        | 1.1                      |   |

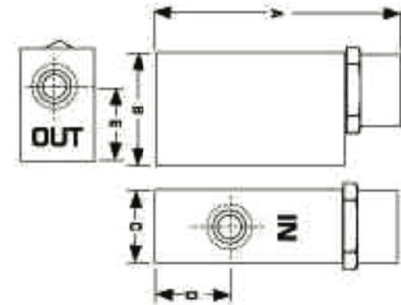

| Body Material | Max Working Pressure PSIG (barg) | Wetted Parts                                    | Seals  |
|---------------|----------------------------------|---|--------|
| Brass         | 1500 (103.42)                    | Brass, Epoxy, Delrin (Brass Piston in 125 Unit) | Viton® |
| 316SS         | 3000 (206.84)                    | 316SS, Epoxy                                    | Viton® |

### Installation

We suggest the unit be calibrated in the attitude in which it will be installed. An actuation point approximately 3 or 4 times normal flow rate should be chosen to avoid the valve actuating from initial pressurization of the system and normal surges. If flow is kept constant, an actuation point 10% above the normal rate may be used.

| Dimensions |              |           |           |           |           |           |
|------------|--------------|-----------|-----------|-----------|-----------|-----------|
| Model      | Weight       | A         | B         | C         | D         | E         |
| EFV-125    | 0.25 (113.4) | 2.5 (64)  | 1 (25)    | 0.75 (19) | 0.7 (17)  | 0.63 (16) |
| EFV-250    | 0.50 (226.8) | 3.3 (84)  | 1.50 (38) | 1 (25)    | 1 (25)    | 1 (25)    |
| EFV-375    | 0.50 (226.8) | 3.3 (84)  | 1.50 (38) | 1 (25)    | 1 (25)    | 1 (25)    |
| EFV-500    | 1 (453.6)    | 4.0 (102) | 2 (50)    | 1.25 (31) | 1.25 (31) | 1.38 (35) |
| EFV-750    | 1.50 (680.4) | 4.9 (124) | 2.25 (57) | 1.25 (31) | 1.25 (31) | 1.63 (41) |

## How to Order

[Sales@ChemTec.com](mailto:Sales@ChemTec.com) | 800.222.2177

| Model | Size                            | Materials   | Positive Shut-Off                             | Options   |
|-------|---------------------------------|---|---|---|
| EFV   | 125<br>250<br>375<br>500<br>750 | B Brass<br>S 316SS<br><br>(Other Material available on request) | PSO<br><br>(Blank for Controlled Bleed Model) | ES Reed Switch (Not available on 125 models)<br>O2 Oxygen Cleaned<br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>FP Factory Presetting (State flow rate, medium and line pressure) Required W/ES Option<br>ESFP Normally Open Reed Switch Option Requires Factory Presetting |

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# EFV MRS Series

Manual Reset Adjustable Excess Flow Valve

## Key Features

Controls excessive flows.

## Features

- Field Adjustable
- Manual Reset
- Materials: 316SS
- Detects Excess Flows
- Function: Shuts Off Flow
- Output: Switch Contact (Optional)

## Applications

- Plant Lines
- Regulator Failure
- Fitting Failure
- Toxic Gases & Liquids
- Gas Distribution Systems
- Gas Analyzers
- Loss Controls



## Operation

Flow enters the unit and makes a right angle to the outlet port across the nose of a magnetic piston. The piston is held in place by attraction to an adjusting screw magnet. A pressure differential is created by flow across the piston. When the differential is great enough, the piston slides to a seat at the outlet port. The flow rate at which the piston actuates can be changed by turning the adjusting screw, thereby changing the piston's relationship with the flow stream. The piston makes a bubble tight seal when it comes in contact with the seat. To reopen the unit, turn the balancing valve handle on the side. This ports the upstream pipeline to the downstream pipeline. When the pressure is equalized on each side of the piston, it will reset. The unit is returned to normal operation by closing the balancing valve.

- Actuation points for air at 68° F and 14.7 PSIA.

Corrections must be used for other gases, line pressure and temperatures.\* Please consult your representative or the factory.

## Temperature Operating Range

- AMBIENT: 0° to 125°F (-18° to 52° C)
- MEDIA: 0° to 180°F (-18° to 82° C)



| Calibration Range |                                  |                                  |           |
|-------------------|----------------------------------|----------------------------------|-----------|
| Model             | Adjustable Range Air SLPM (SCFM) | Adjustable Range Water LPM (GPM) | PORT FNPT |
| EFV-125           | 0.5 to 155.7<br>(0.018 to 5.5)   | 0.015 to 4.5<br>(0.004 to 1.2)   | 1/8"      |
| EFV-250           | 4 to 1132<br>(0.14 to 40)        | 0.100 to 15.1<br>(0.026 to 4.0)  | 1/4"      |
| EFV-375           | 85 to 1840<br>(3.0 to 65)        | 0.380 to 15.1<br>(0.100 to 4.0)  | 3/8"      |
| EFV-500           | 142 to 2123<br>(5.0 to 75)       | 1.90 to 37.8<br>(0.50 to 10.0)   | 1/2"      |
| EFV-750           | 425 to 3681<br>(15.0 to 130)     | 3.80 to 75.7<br>(1.0 to 20.0)    | 3/4"      |


| Pressure Loss |                 |                 |                              |
|---------------|-----------------|-----------------|------------------------------|
| Model         | Air SLPM (SCFM) | Water LPM (GPM) | ΔP to Atmosphere BARD (PSID) |
| EFV-125       | 0.50 (0.018)    | 0.015 (0.004)   | 0.08 (1.2)                   |
|               | 75 (2.63)       | 2.65 (0.70)     | 0.11 (1.6)                   |
|               | 155 (5.5)       | 4.50 (1.20)     | 0.21 (3.0)                   |
| EFV-250       | 4 (0.14)        | 0.1 (0.26)      | 0.21 (3.0)                   |
|               | 500 (17.50)     | 5.0 (1.32)      | 0.41 (6.0)                   |
|               | 1132 (39.62)    | 15.1 (3.99)     | 0.83 (12.0)                  |
| EFV-375       | 85 (2.98)       | 0.38 (0.10)     | 0.10 (1.5)                   |
|               | 900 (31.50)     | 10.0 (2.64)     | 0.28 (4.0)                   |
|               | 1840 (64.40)    | 15.1 (3.99)     | 0.83 (12.0)                  |
| EFV-500       | 142 (4.97)      | 1.9 (0.50)      | 0.07 (1.0)                   |
|               | 1000 (35.00)    | 25.0 (6.60)     | 0.28 (4.0)                   |
|               | 2123 (74.31)    | 37.8 (9.98)     | 0.48 (7.0)                   |
| EFV-750       | 425 (14.88)     | 3.8 (1.00)      | 0.14 (2.0)                   |
|               | 1800 (63.00)    | 4.7 (1.24)      | 0.21 (3.0)                   |
|               | 3681 (128.84)   | 75.7 (19.98)    | 0.34 (5.0)                   |

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.


# EFV MRS Series

Manual Reset Adjustable Excess Flow Valve

## ES - Options

| Switch Data                   | SPST<br>UL File #E471070 | LEADS   |
|-------------------------------|--------------------------|---|
| Maximum Switching Voltage     |                          |  |
| DC (V)                        | 250                      |   |
| AC (V)                        | 265                      |   |
| Contact Rating                |                          | leads 18 in. min.<br>from body 22 AWG,<br>TFE insulation                          |
| DC (W)                        | 50                       |   |
| DC (VA)                       | 50                       |   |
| Maximum Switching Current (A) |                          |   |
| DC (A)                        | 1.5                      |   |
| AC (A)                        | 1.1                      |   |

| Body Material | Max Working Pressure PSIG (barg) | Wetted Parts                                    | Seals  |
|---------------|----------------------------------|---|--------|
| Brass         | 1500 (103.42)                    | Brass, Epoxy, Delrin (Brass Piston in 125 Unit) | Viton® |
| 316SS         | 3000 (206.84)                    | 316SS, Epoxy                                    | Viton® |

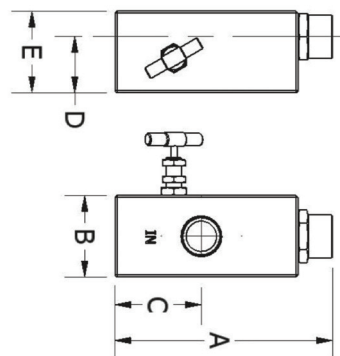

## Installation

We suggest the unit be calibrated in the attitude in which it will be installed. An actuation point approximately 3 or 4 times the normal Maximum flow rate at the lowest line pressure should be chosen to avoid the valve actuating from initial pressurization of the system and normal surges. If flow is kept constant, an actuation point 10% above the normal rate may be used.

## Dimensions

| Model   | 316SS Weight (lbs/gm) | Brass Weight (lbs/gm) | A          | B 316SS  | B Brass   | C         | D         | E         |
|---------|-----------------------|-----------------------|------------|----------|-----------|-----------|-----------|-----------|
| EFV-125 | 1.5 (680)             | 1.6 (726)             | 2.72 (69)  | 1.5 (38) | 1.5 (38)  | 0.95 (24) | 1.12 (28) | 1.62 (41) |
| EFV-250 | 3.5 (1588)            | 3.3 (1497)            | 3.71 (95)  | 2 (50)   | 1.75 (45) | 1.5 (38)  | 1.38 (35) | 2 (51)    |
| EFV-375 | 3.5 (1588)            | 3.2 (1452)            | 3.71 (95)  | 2 (50)   | 1.75 (45) | 1.5 (38)  | 1.38 (35) | 2 (51)    |
| EFV-500 | 4 (1814)              | 3.6 (1633)            | 4.46 (114) | 2 (50)   | 1.75 (45) | 1.75 (45) | 1.38 (35) | 2 (51)    |
| EFV-750 | 4.8 (2177)            | 4.4 (1996)            | 5.35 (136) | 2 (50)   | 1.75 (45) | 2.13 (54) | 1.38 (35) | 2 (51)    |

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size                            | Materials   | Manual Reset | Options   |
|-------|---------------------------------|---|--------------|---|
| EFV   | 125<br>250<br>375<br>500<br>750 | B Brass<br>S 316SS<br><br>(Other Material available on request) | MRS          | ES* Reed Switch (Not available on 125 models)<br>O2 Oxygen Cleaned<br>HT High Temperature Unit 340°F (171°C)<br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>FP* Factory Presetting (State flow rate, medium and line pressure) Required W/ES Option<br>ESFP Normally Open Reed Switch Option Requires Factory Presetting |

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# HPEFV Series

Adjustable High Pressure Safety Excess Flow Valve

## Key Features

Controls high pressure excessive flows.

## Features

- Controlled Bleed Resets Automatically
- Field Adjustable
- Positive Shut-off Option
- Materials: 316SS
- Maximum Pressure 6000 PSIG
- Detects Excess Flows
- Output: Switch Contact (Optional)
- Function: Restricts or Shuts Off Flow

## Applications

- CNG Delivery
- High Pressure Plant Lines
- Hydraulic Systems



## Operation

Flow enters the unit and makes a right angle to the outlet port across the nose of a magnetic piston. The piston is held in place by attraction to an adjusting screw magnet. A pressure differential is created by flow across the piston. When the differential is great enough, the piston slides to a seat at the outlet port. The flow rate at which the piston actuates can be changed externally by turning the adjusting screw, thereby changing the piston's relationship with the flow stream. In the auto reset model after actuation, the piston resets on a metal to metal seat that allows a controlled bleed. To reset the unit, pressure must be equalized on both sides of the piston.

For positive shut-off an elastomer is used on the nose of the piston. When it comes to rest on the seat it provides a bubble tight closure. To reopen the valve there are two options.

1. The upstream pipeline must be bled to atmosphere if the line downstream is at atmosphere.
2. A by-pass line with an on/off valve must be installed to port the upstream pressure to the down-stream pipeline to equalize the pressure.

- Actuation points for air at 68°F and 14.7 PSIA.

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

## Temperature Operating Range

- 32° to 220°F (-0° to 104°C)
- For other temperature ranges consult factory.

CE

## Calibration Range

| Model     | Adjustable Range Air SLPM (SCFM) | Adjustable Range Water LPM (GPM) | PORT FNPT |
|-----------|----------------------------------|----------------------------------|-----------|
| HPEFV-250 | 4 to 1132 (0.14 to 40)           | 0.100 to 15.1 (0.026 to 4)       | 1/4"      |
| HPEFV-500 | 142 to 2123 (5 to 75)            | 1.9 to 37.8 (0.5 to 10)          | 1/2"      |
| HPEFV-750 | 425 to 3681 (15 to 130)          | 3.8 to 75.7 (1 to 20)            | 3/4"      |

## Pressure Loss


| Model     | Air SLPM (SCFM) | Water LPM (GPM) | $\Delta P$ to Atmosphere BARD (PSID) |
|-----------|-----------------|-----------------|--------------------------------------|
| HPEFV-250 | 4 (0.14)        | 0.1 (0.26)      | 0.21 (3.0)                           |
|           | 500 (17.5)      | 5 (1.32)        | 0.41 (6)                             |
|           | 1132 (39.62)    | 15.1 (3.99)     | 0.83 (12)                            |
| HPEFV-500 | 142 (4.97)      | 1.9 (0.5)       | 0.07 (1)                             |
|           | 1000 (35)       | 25 (6.6)        | 0.28 (4)                             |
|           | 2123 (74.31)    | 37.8 (9.98)     | 0.48 (7)                             |
| HPEFV-750 | 425 (14.88)     | 3.8 (1)         | 0.14 (2)                             |
|           | 1800 (63)       | 4.7 (12.4)      | 0.21 (3)                             |
|           | 3681 (128.84)   | 75.7 (19.98)    | 0.34 (5)                             |


\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

# HPEFV Series

Adjustable High Pressure Safety Excess Flow Valve

## ES - Option

| Switch Data                   | SPST<br>UL File #E471070 | LEADS   |
|-------------------------------|--------------------------|---|
| Maximum Switching Voltage     |                          |  |
| DC (V)                        | 250                      |   |
| AC (V)                        | 265                      |   |
| Contact Rating                |                          | leads 18 in. min.<br>from body 22 AWG,<br>TFE insulation                          |
| DC (W)                        | 50                       |   |
| DC (VA)                       | 50                       |   |
| Maximum Switching Current (A) |                          |   |
| DC (A)                        | 1.5                      |   |
| AC (A)                        | 1.1                      |   |

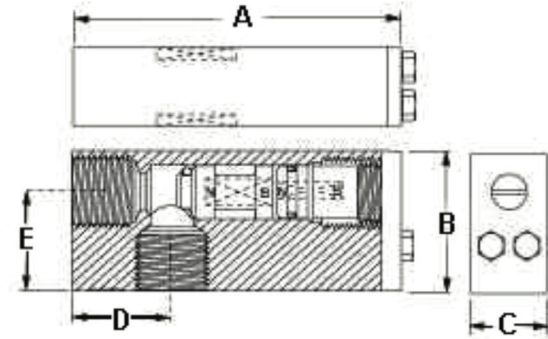

## Specifications

| Body Material | Max Working Pressure PSIG (barg) | Wetted Parts | Seal   |
|---------------|----------------------------------|--------------|--------|
| 316SS         | 6,000 (414)                      | 316SS, Epoxy | Viton® |

## Installation

We suggest the unit be calibrated in the attitude in which it will be installed. An actuation point approximately 3 or 4 times the normal Maximum flow rate at the lowest line pressure should be chosen to avoid the valve actuating from initial pressurization of the system and normal surges. If flow is kept constant, an actuation point 10% above the normal rate may be used.

## Dimensions

| Model     | Weight       | A          | B         | C         | D          | E          |
|-----------|--------------|------------|-----------|-----------|------------|------------|
| HPEFV-250 | 1.47 (0.667) | 3.75 (149) | 1.5 (38)  | 1 (25)    | 1 (25)     | 1 (25)     |
| HPEFV-500 | 2.625 (1.19) | 4.25 (108) | 2 (50)    | 1.25 (32) | 1.25 (32)  | 1.37 (35)  |
| HPEFV-750 | 3.44 (1.56)  | 5.25 (133) | 2.25 (57) | 1.25 (32) | 1.625 (45) | 1.625 (41) |

## How to Order

Sales@ChemTec.com | 800.222.2177

| Model | Size              | Materials  | Positive Shut-Off                         | Options  |
|-------|-------------------|--|---|--|
| HPEFV | 200<br>500<br>750 | S 316SS<br><br>(Other Material available on request) | PSO<br>(Blank for controlled bleed model) | O2 Oxygen Cleaned<br>HT High Temperature<br>Unit 340° F (171° C)<br>KZ FFKM Perfluoroelastomer<br>EPR EPR Seals<br>FP* Factory Presetting (State flow rate, medium and line pressure)<br>Required W/ES Option<br>ESFP Normally Open Reed Switch Option Requires Factory Presetting |

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

## ChemTec's Ultra High Purity Teflon® LPH Series Flow Monitors

|                                       |                              |
|---------------------------------------|------------------------------|
| Flow Range                            | 50 ML to 5000 ML             |
| Flared Fitting Ports                  | 1/4", 3/8", 1/2"             |
| Super-300 Type Nippon Pillar Fitting® | 1/8", 1/4", 3/8", 1/2", 3/4" |

\*\*More Custom Options Available, please contact the factory



Flared Fitting



NPS300

## ChemTec's Ultra High Purity Teflon® MAO Flow Meter

| Calibration in Water Tables |                   | VDC | Hz    | mA   | Ports FN    |
|-----------------------------|-------------------|-----|-------|------|-------------|
| MAO 125/250                 | 0 ML - 1800 ML    | 0-5 | 0-200 | 0-20 | 1/8" - 1/4" |
| MAO 500                     | 0.5 GPM - 3.5 GPM | 0-5 | 0-200 | 0-20 | 1/2"        |



MAO 125/250



MAO 500

*\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.*

# LPH UHP 250 Series

for Ultra High Purity

## Applications

- Ultra High Purity Gases

## Key Features

- Compact Size
- Tube Stub

## Features

- Close On/Off Differential
- No Seals
- EP to 10RA
- 316L Stainless Steel Materials
- Senses High/Low Flow Conditions
- Switch Contact Output
- In-Line Vertical Plumbing
- Confirms Normal Flow Conditions

## Operations

As flow is established upward through the unit and continues to increase, the pressure differential across the grooved magnetic piston increases until it overcomes the small piston's resistance. This causes it to progress fully upward which actuates a hermetically sealed reed switch.

## Features

- Actuation Points for Nitrogen on increasing flow (see graph)
- Deactuation Points averages 10% less than actuation point
- Flow Setting Accuracy  $\pm 10\%$  of actuation points shown
- Repeatability  $\pm 1\%$
- Unit will pass greater flows


| Switch Data                   | SPDT |
|-------------------------------|------|
| Maximum Switching Voltage     |      |
| DC (V)                        | 175  |
| AC (V)                        | 120  |
| Contact Rating                |      |
| DC (W)                        | 5    |
| AC (VA)                       | 5    |
| Maximum Switching Current (A) |      |
| DC (A)                        | 0.25 |
| AC (A)                        | 0.18 |

## Leads

- SPDT - 36" min. from body; 24 AWG PVC jacketed wire
- black: N.O., red: N.C., white: common

\*Above values for resistive loads only. For inductive loads, surge current & rush current contact protection is required.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

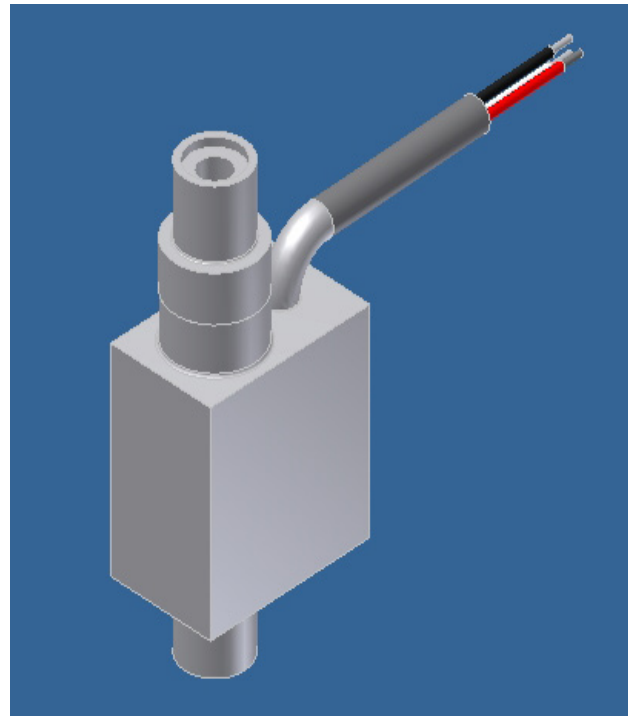

## Temperature Operating Range

- -40° to 220°F; (-40° to 105°C)
- For other temperature ranges consult factory.

## Calibration Range

| Model     | Weight Lbs. (Kg) | Max Working Pressure PSIG (barg) | Wetted Parts         | Fluid Ports    | Leak Check                  |
|-----------|------------------|----------------------------------|----------------------|----------------|-----------------------------|
| LPH-UHP-8 | 0.25 lb/ 0.14 kg | 3000 PSIG (206.8 barg)           | 316L Stainless Steel | 3/8" O.D. Tube | 1x10 atm. ccHe/sec in board |

## Installation

Mount vertical with inlet port down.

## How to Order

| Model       | Calibration Range |
|-------------|-------------------|
| LPH UHP 250 | A<br>B<br>C       |

\*Contact factory for more options.



# LPH UHP 250/375 Series

for Ultra High Purity

31

## Applications

- Ultra High Purity Gases

## Key Features

- Compact Size
- Tube Stub

## Features

- Close On/Off Differential
- No Seals
- Internal Finish to 10RA
- 316L Stainless Steel Materials
- Senses High/Low Flow Conditions
- Switch Contact Output
- In-Line Vertical Plumbing
- Confirms Normal Flow Conditions

## Operations

As flow is established upward through the unit and continues to increase, the pressure differential across the magnetic piston increases until it overcomes the small piston's resistance. This causes it to progress fully upward which actuates a hermetically sealed reed switch.


## Features

- Actuation Points for Nitrogen on increasing flow (see graph)
- Deactuation Points averages 10% less than actuation point
- Flow Setting Accuracy  $\pm 10\%$  of actuation points shown
- Repeatability  $\pm 1\%$
- Unit will pass greater flows

| Specifications |                     |                                  |                            |                                       |
|----------------|---------------------|----------------------------------|----------------------------|---------------------------------------|
| Model          | Weight Lbs. (Kg)    | Max Working Pressure PSIG (barg) | Wetted Parts               | Leak Check                            |
| LPH-UHP        | 0.3 lb/<br>0.134 kg | 4000 PSIG<br>(275.8 barg)        | 316L<br>Stainless<br>Steel | 1x10(-9) atm.<br>ccHe/sec in<br>board |

## Installation

Mount vertical with inlet port down.

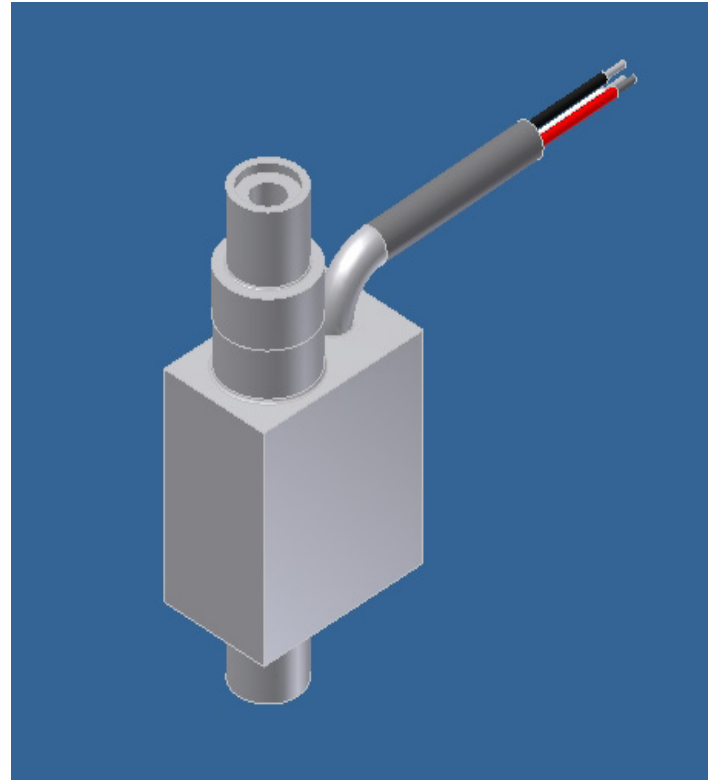

| Switch Data                   | SPDT<br>UL File #E471070 |
|-------------------------------|--------------------------|
| Maximum Switching Voltage     |                          |
| DC (V)                        | 175                      |
| AC (V)                        | 120                      |
| Contact Rating                |                          |
| DC (W)                        | 5                        |
| AC (VA)                       | 5                        |
| Maximum Switching Current (A) |                          |
| DC (A)                        | 0.25                     |
| AC (A)                        | 0.18                     |

\*Above values for resistive loads only. For inductive loads, surge current & rush current contact protection is required.


## Leads

- 36" min. from body; 22 AWG PVC jacketed wire  
- black: N.O., red: N.C., white: common

## Temperature Operating Range

- -40° to 220°F; (-40° to 105°C)

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

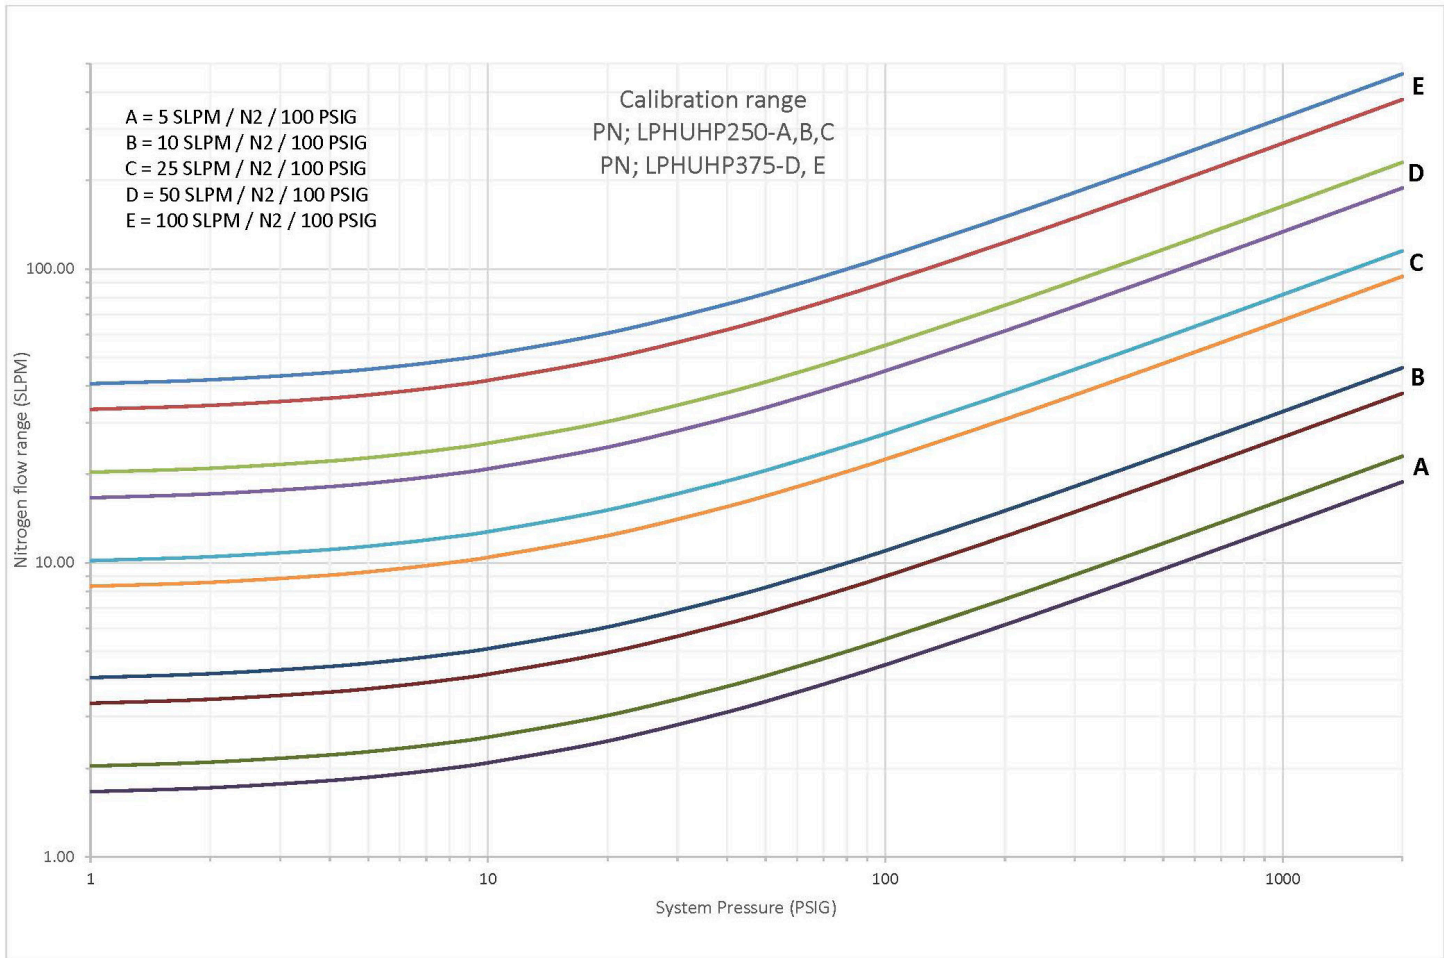

| How to Order |                   |                                      |
|--------------|-------------------|--------------------------------------|
| Model        | Calibration Range | Ports                                |
| LPH UHP 250  | A, B or C         | T4 - 1/4 OD TUBE<br>T6 - 3/8 OD TUBE |
| LPH UHP 375  | D or E            | T4 - 1/4 OD TUBE<br>T6 - 3/8 OD TUBE |

\*Contact factory for more options.

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

## Applications

- Semi-Conductor Gases

## Key Features

- Compact Size
- Ultra High Purity

## Features


- Close On/Off Differential
- No Seals
- Internal finish 10RA
- 316L Stainless Steel Materials
- Senses High/Low Flow Conditions
- Switch Contact Output
- In-Line Vertical Plumbing
- Confirms Normal Flow Conditions

## Operations

As flow is established upward through the unit and continues to increase, the pressure differential across the magnetic piston increases until it overcomes the small piston's resistance. This causes it to progress fully upward which actuates a hermetically sealed reed switch. This is a snap action and occurs in the decreasing mode as well.

## Features

- Actuation Points for Nitrogen on increasing flow (see graph)
- Deactuation Points averages 10% less than actuation point
- Flow Setting Accuracy  $\pm 10\%$  of actuation points shown
- Repeatability  $\pm 1\%$
- Unit will pass greater flows

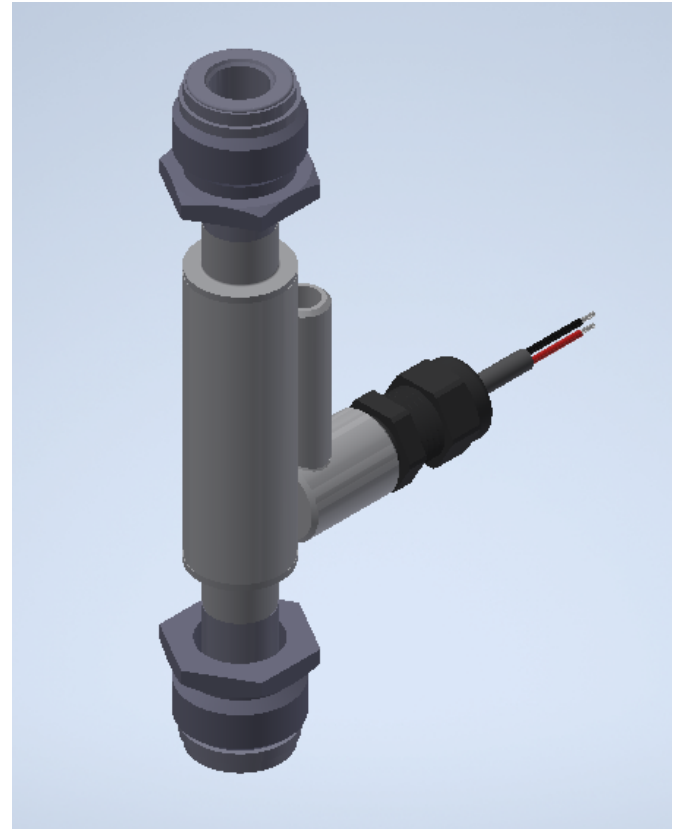

## Specifications

| Model         | Weight<br>Lbs.<br>(Kg) | Max Working<br>Pressure<br>PSIG (barg) | Wetted<br>Parts            | Leak<br>Check                     |
|---------------|------------------------|--|----------------------------|-----------------------------------|
| LPH-<br>UHP 8 | 0.5 lb/<br>0.23 kg     | 3000 PSIG<br>(206.8 barg)              | 316L<br>Stainless<br>Steel | 1x10 atm.<br>ccHe/sec<br>in board |

## Temperature Operating Range


- $-40^{\circ}$  to  $220^{\circ}\text{F}$ ; ( $-40^{\circ}$  to  $105^{\circ}\text{C}$ ).

## Fluid Ports

- 1/2" MVCR (8)

## Installation

Mount vertical with inlet port down.

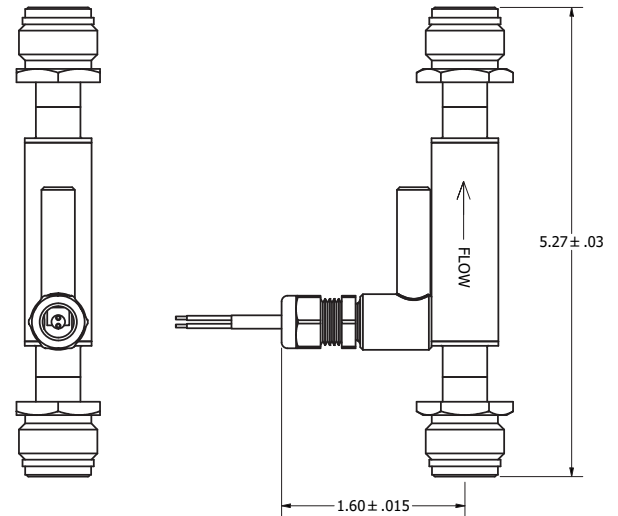


PN; LPHUHP-8

## How to Order

| <u>Model</u> | <u>Calibration Range</u> | <u>Switch</u> |
|--------------|--------------------------|---------------|
| LPH-UHP-8    | A, B, or C               | N.C. or SPDT  |

*\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.*

Calibration Range

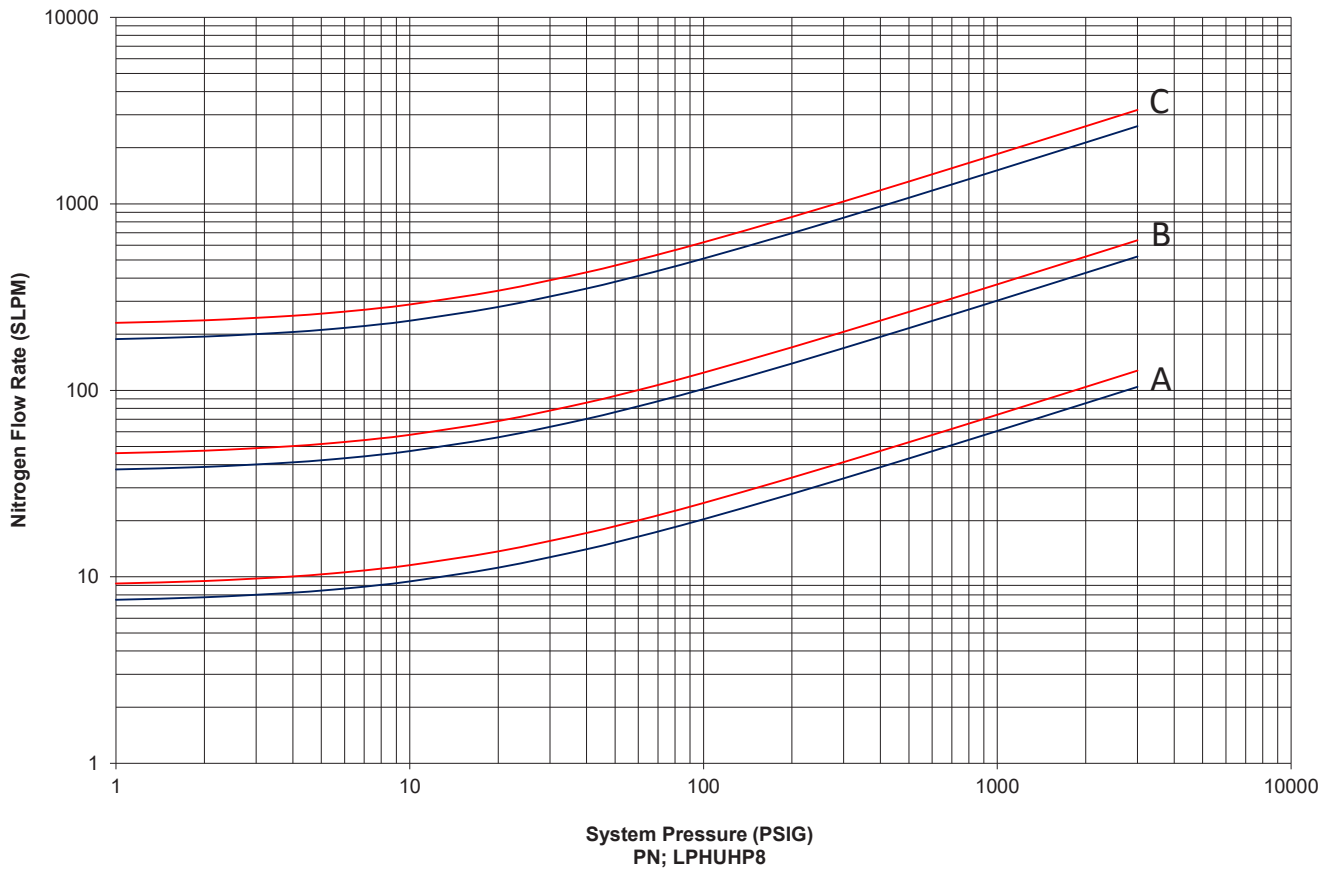

| Switch Data                   | SPST | SPDT<br>UL File #E471070 |
|-------------------------------|------|--------------------------|
| Maximum Switching Voltage     |      |                          |
| DC (V)                        | 250  | 175                      |
| AC (V)                        | 265  | 120                      |
| Contact Rating                |      |                          |
| DC (W)                        | 50   | 5                        |
| AC (VA)                       | 50   | 5                        |
| Maximum Switching Current (A) |      |                          |
| DC (A)                        | 1.5  | 0.25                     |
| AC (A)                        | 1.1  | 0.18                     |

\*Above values for resistive loads only. For inductive loads, surge current & rush current contact protection is required.

### Leads

- SPST: 36" min. from body; 22 AWG PVC red, black jacketed wire
- SPDT: 36" min. from body; 22 AWG PVC jacketed wire- black: N.O., red: N.C.; white: common

\*Users are solely accountable for product selection, regardless of any recommendations or suggestions provided by ChemTec Equipment Company, Inc. Users should base product selection on their own analysis and testing to determine functionality and material compatibility in relation to their application. To ensure safe and trouble-free performance, it is essential to adhere to proper installation, operation, and maintenance procedures.

## Contact Protection Requirements





When switching inductive loads such as relays, solenoids and transformers, reed switch contacts require protection in order to insure long dependable life. When current is interrupted, the inductance or electrical inertia of the load generates a large high frequency voltage, which spreads across the switch contacts. If the voltage is large enough, it can break down the medium in the gap between them, making a conductive path. This phenomenon, called "arcing" is the spark you see. Arcing can cause the contacts to bum, weld together or stick; thus, giving unreliable performance. The purpose of protection circuits is to prevent arcing; by shortening this voltage through an alternate path.

## Recommended Protection - D.C.

A 1N4004 diode (or equivalent) connected cathode-to-positive, as shown in Figure 1 (see below), is recommended. The diode does not conduct when the load is energized, but conducts and shorts out the generated voltage when the switch opens. The generated voltage always acts in series with the applied voltage.

## Recommended Protection - A.C.

A resistor and capacitor, connected in parallel with the switch, as shown in Figure 2 (see below), is recommended. The capacitor is a high impedance to 60 hertz, but is essentially a short circuit to high frequencies of generated voltages. Transient suppressors or varistors may also be used to dissipate the transient and protect the switch contacts.

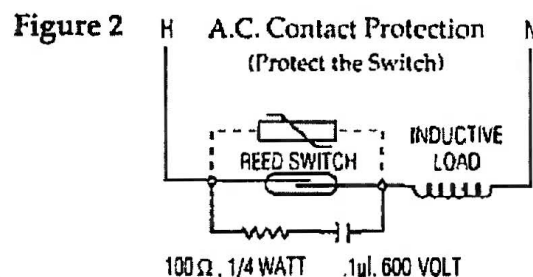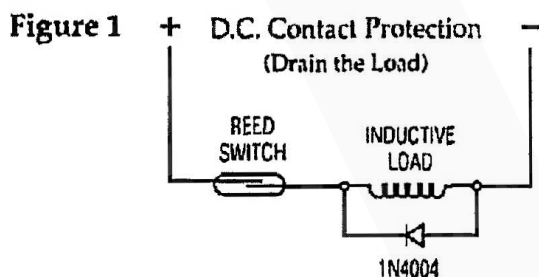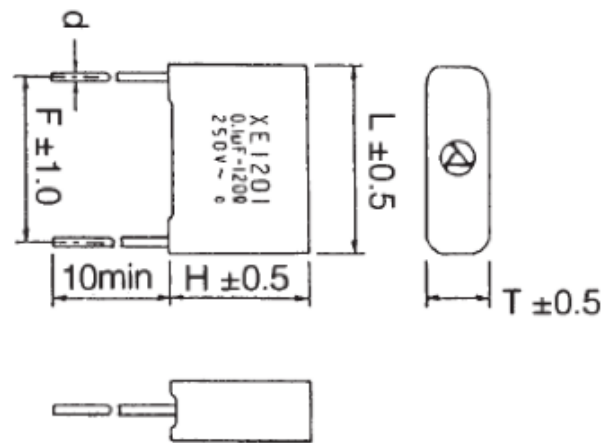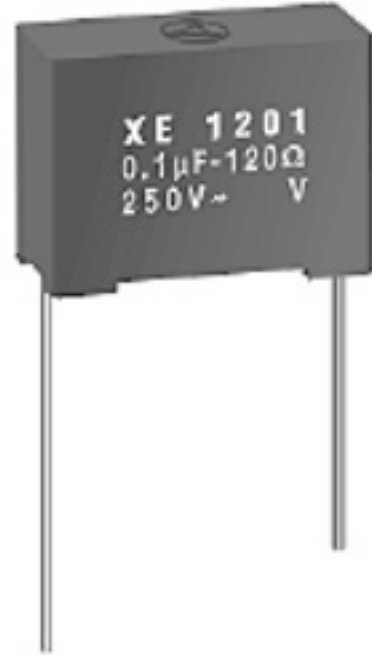

**Flow Monitors,  
Flow Meters,  
Excess Flow Valves**